




ELECTRICAL
CONNECTION SYSTEM
电气连接系统

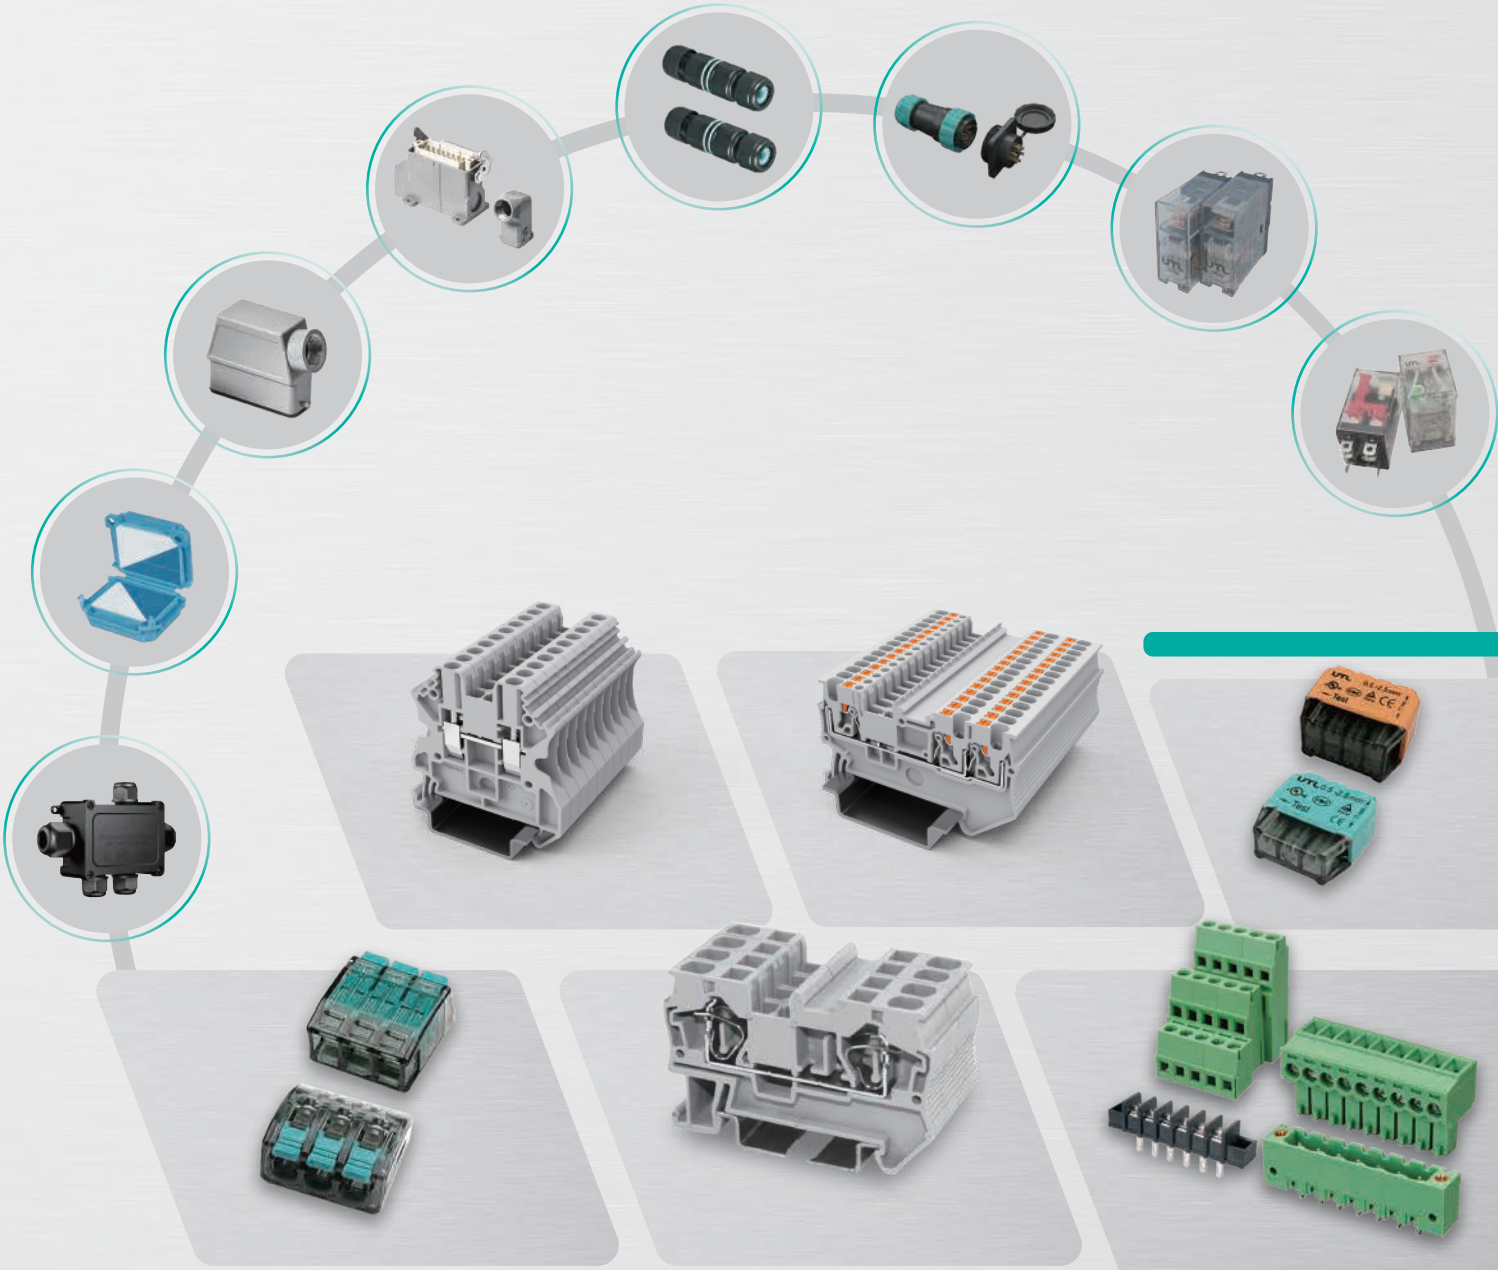

尤提乐电气有限公司
UTILITY ELECTRICAL CO.,LTD

服务热线 400-021-8088

E-mail:marketing@china-utl.com
Http://www.china-utl.com

SINCE 1990

UTL[®]





1990成立
START FROM 1990



浙江温州总部
HQ IN ZHEJIANG WENZHOU



60000+m²



3座制造基地
3 PLANTS



50+研发人员
ENGINEERS 50+



500+员工
EMPLOYEE 500+



100+专利
PATENT 100+



10000+货号
ORDER NUMBER 10000+



20%+年增长率
YEAR INCREMENT 20%+



企业简介

尤提乐电气有限公司, 成立于1990年, 坐落于中国低压电器之都柳市, 是数字化电气基础网络解决方案提供商。

公司多年来积极布局电气基础网络上下游, 形成了集“研发设计、模具制造、注塑冲压、生产组装”的全产业链优势。业务遍及欧洲、亚洲、南北美洲多个国家和地区。作为一家以外销为主(出口占65%销售总额)的无区域民营独资企业, 尤提乐电气置身于国际市场, 直面全球数字化电气浪潮, 倾听客户声音, 通过加大研发投入、精进制造工艺, 优化生产流程、提升服务品质。已晋升为全球连接器行业第一梯队。

尤提乐电气设有两大营销中心: 中国上海、中国深圳; 三大现代化生产基地: 浙江温州、江苏昆山、安徽滁州; 并拥有超过100家代理和遍布全球的销售网络。随着绿色能源、智能制造和数字化发展的大趋势, 尤提乐电气以“两点一纵辐射全球”的战略布局, 构建从上海到深圳的东南沿海产业群, 一站式高效服务海内外用户。

2020年, 总经理朱品优先生提出了以“顺应时代, 先于时代, 敢于创新, 持续创新”的战略方针。加强数字化电气基础网络的研发, 持续提升企业品牌国际影响力, 推动数字电气全球化。

ABOUT US

UTL Electrical Co., Ltd., established in 1990 and located in Liushi, the capital of low-voltage electrical appliances in China, is a provider of digital electrical infrastructure network solutions.

Over the years, the company has actively laid out the upstream and downstream of the electrical infrastructure network, forming a full industry chain advantage integrating "R&D design, mold manufacturing, injection molding and stamping, and production assembly." Its business spans multiple countries and regions in Europe, Asia, and the Americas. As a non-regional private enterprise mainly focused on export (exports account for 65% of total sales), Yutile Electric is positioned in the international market, directly facing the global digital electrical wave, listening to customer voices, increasing R&D investment, refining manufacturing processes, optimizing production processes, and improving service quality. It has risen to the first echelon of the global connector industry.

UTL Electric has two major marketing centers: Shanghai, China, and Shenzhen, China; three modern production bases: Wenzhou, Zhejiang; Kunshan, Jiangsu; and Chuzhou, Anhui; and has more than 100 agents and a global sales network. With the trend of green energy, intelligent manufacturing, and digital development, Yutile Electric, with the strategic layout of "two points and one vertical radiation globally," has built an industrial cluster along the southeast coast from Shanghai to Shenzhen, providing one-stop efficient services to domestic and overseas users.


In 2020, General Manager Mr. Zhu Pinyou proposed the strategic guideline of "complying with the times, ahead of the times, daring to innovate, and continuously innovating." Strengthening the R&D of digital electrical infrastructure networks, continuously enhancing the international influence of the corporate brand, and promoting the globalization of digital electrical.

匠心尤存 至臻致远

高品质是赢得市场的保证,而有效的现代化管理和质量体系是支撑高品质的前提。在产品标准方面,尤提乐潜心研究了IEC、UL、CSA、GB、CE、CCC等国际国内关于接线端子的标准,并按照这些标准自行编制了更为严格的企业标准,从产品的开发、模具的设计、原材料的采购、金属零部件的制作、塑料配件的成型,到成品组装以及品质检测、包装发货等,每个环节均由专业的人员按照相应的标准层层把关,以生产适销对路、应用于全球范围内工业自动化领域的产品为己任,积极追随、引进、借鉴国际知名品牌的技术,科技创新,锐意进取。目前公司生产的数十个系列,上千个规格的产品,为客户选型提供了丰富的产品保障。

High quality is the guarantee of winning the market, while effective modern management and quality system is the premise to support high quality. In terms of product standards, especially UTL has studied IEC, UL, CSA, GB, CE, CCC with great concentration and other international and domestic standards for wiring terminals, and according to these standards, The company has compiled stricter corporate standards, from product development, mold design, procurement of raw materials, production of metal parts, plastic parts From the forming of parts, to the assembly of finished products, quality inspection, packaging and delivery, etc. Each link is checked by professional personnel according to the corresponding standards. To produce marketable products, used in the field of industrial automation worldwide products as their own responsibility, actively follow, introduce and learn from internationally renowned brand technology, technological innovation, and forge ahead. The company currently produces dozens of a series of products with thousands of specifications, providing a wealthy of choices for customers product guarantee.


CONTENTS 产品目录




导轨接线端子
Rail mounting
terminal block
05



接线端子附件
Terminal block
accessory
26




PCB接线端子
PCB terminal block
31




继电器及底座
Relay and Base
40




快速接线端子
Quick connector
47




防水连接器
Waterproof connector
48




防水盒
Waterproof junction box
53



电缆防水接头
Cable gland
55




航空连接器
Air connector
56



重载连接器
Heavy duty connector
58

Screw terminal block-UUT series
螺钉式接线端子-UUT系列

				
UUT-2.5-GY CE 1000V/24A 0.2-4mm² -- 24-12AWG -- --	UUT-2.5PE CE -- 0.2-4mm² -- 24-12AWG -- --	UUT-2.5/1-2-GY CE 500V/24A 0.2-4mm² -- 24-12AWG -- --	UUT-2.5/1-2PE CE -- 0.2-4mm² -- 24-12AWG -- --	UUT-2.5/2-2-GY CE 500V/24A 0.2-4mm² -- 24-12AWG -- --
				
UUT-2.5/2-2PE CE -- 0.2-4mm² 1000V/24A 24-12AWG -- --	UUT-2.5/2-GY CE 500V/24A 0.2-4mm² -- 24-12AWG -- --	UUT-2.5/2L-GY CE 500V/24A 0.2-4mm² -- 24-12AWG -- --	UUT-2.5/2PE CE -- 0.2-4mm² -- 24-12AWG -- --	UUT-2.5K-GY CE 400V/20A 0.2-4mm² -- 24-12AWG -- --
				
UUT-2.5K-P/P-GY CE 400V/20A 0.2-4mm² -- 24-12AWG -- --	UUT-4-GY CE 1000V/32A 0.2-6mm² -- 24-10AWG -- --	UUT-4PE CE -- 0.2-6mm² -- 24-10AWG -- --	UUT-4/1-2-GY CE 500V/32A 0.2-6mm² -- 24-10AWG -- --	UUT-4/1-2PE CE -- 0.2-6mm² -- 24-10AWG -- --
				
UUT-4/2-2-GY CE 500V/32A 0.2-6mm² -- 24-10AWG -- --	UUT-4/2-2PE CE -- 0.2-6mm² -- 24-10AWG -- --	UUT-4/2-GY CE 1000V/30A 0.2-6mm² -- 24-10AWG -- --	UUT-4/2L-GY CE 1000V/30A 0.2-6mm² -- 24-10AWG -- --	UUT-4/2PE CE -- 0.2-6mm² -- 24-10AWG -- --
				
UUT-4RD CE 500V/6.3A 0.2-6mm² -- 24-10AWG -- --	UUT-4RD/LED24 CE 24V/6.3A 0.2-6mm² -- 24-10AWG -- --	UUT-4RD/LED60 CE 60V/6.3A 0.2-6mm² -- 24-10AWG -- --	UUT-4RD-LA250 CE 250V/6.3A 0.2-6mm² -- 24-10AWG -- --	UUT-4K-GY CE 500V/20A 0.2-6mm² -- 24-10AWG -- --

Screw terminal block-UUT series
螺钉式接线端子-UUT系列

				
UUT-4K-P/P-GY CE 500V/20A 0.2-6mm² -- 24-10AWG -- --	UUT-6-GY CE 1000V/41A 0.2-10mm² -- 24-8AWG -- --	UUT-6PE CE -- 0.2-10mm² -- 24-8AWG -- --	UUT-6S-HV-GY CE 1000V/41A 0.2-10mm² -- 24-8AWG -- --	UUT-6S-HV-P/P-GY CE 1000V/41A 0.2-10mm² -- 24-8AWG -- --
				
UTB-6S-GY CE 500V/41A 1-6mm² -- 18-10AWG -- --	UUT-10-GY CE 1000V/57A 0.5-16mm² -- 20-6AWG -- --	UUT-10PE CE -- 0.5-16mm² -- 20-6AWG -- --	UUT-16-GY CE 1000V/76A 1.5-25mm² -- 14-4AWG -- --	UUT-16PE CE -- 1.5-25mm² -- 14-4AWG -- --
				
UUT-35-GY CE 1000V/125A 1.5-50mm² -- 14-2AWG -- --	UUT-35PE CE -- 1.5-50mm² -- 14-2AWG -- --			

Screw terminal block-UUK series
螺钉式接线端子-UUK系列




				
UUK-2.5-GY	UUK-2.5PE	UUK-2.5/1-2-GY	UUK-2.5/1-2PE	UUK-2.5/2-2-GY
CE 1000V/24A 0.2-4mm²	CE -- 0.2-4mm²	CE 500V/24A 0.2-4mm²	CE -- 0.2-4mm²	CE 500V/24A 0.2-4mm²
-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG
-- --	-- --	-- --	-- --	-- --
				
UUK-2.5/2-2PE	UUK-2.5/2-GY	UUK-2.5/2L-GY	UUK-2.5/2PE	UUK-2.5K-GY
CE -- 0.2-4mm²	CE 500V/24A 0.2-4mm²	CE 500V/24A 0.2-4mm²	CE -- 0.2-4mm²	CE 400V/20A 0.2-4mm²
1000V/24A 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG
-- --	-- --	-- --	-- --	-- --
				
UUK-2.5K-P/P-GY	UUK-4-GY	UUK-4PE	UUK-4/1-2-GY	UUK-4/1-2PE
CE 400V/20A 0.2-4mm²	CE 1000V/32A 0.2-6mm²	CE -- 0.2-6mm²	CE 500V/32A 0.2-6mm²	CE -- 0.2-6mm²
-- 24-12AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG
-- --	-- --	-- --	-- --	-- --
				
UUK-4/2-2-GY	UUK-4/2-2PE	UUK-4/2-GY	UUK-4/2L-GY	UUK-4/2PE
CE 500V/32A 0.2-6mm²	CE -- 0.2-6mm²	CE 1000V/30A 0.2-6mm²	CE 1000V/30A 0.2-6mm²	CE -- 0.2-6mm²
-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG
-- --	-- --	-- --	-- --	-- --
				
UUK-4RD	UUK-4RD/LED24	UUK-4RD/LED60	UUK-4RD-LA250	UUK-4K-GY
CE 500V/6.3A 0.2-6mm²	CE 24V/6.3A 0.2-6mm²	CE 60V/6.3A 0.2-6mm²	CE 250V/6.3A 0.2-6mm²	CE 500V/20A 0.2-6mm²
-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG
-- --	-- --	-- --	-- --	-- --

Screw terminal block-UUK series
螺钉式接线端子-UUK系列

				
UUK-4K-P/P-GY	UUK-6-GY	UUK-6PE	UUK-6S-HV-GY	UUK-6S-HV-P/P-GY
CE 500V/20A 0.2-6mm²	CE 1000V/41A 0.2-10mm²	CE -- 0.2-10mm²	CE 1000V/41A 0.2-10mm²	CE 1000V/41A 0.2-10mm²
-- 24-10AWG	-- 24-8AWG	-- 24-8AWG	-- 24-8AWG	-- 24-8AWG
-- --	-- --	-- --	-- --	-- --
				
UTK-6S-GY	UUK-10-GY	UUK-10PE		
CE 500V/41A 1-6mm²	CE 1000V/57A 0.5-16mm²	CE -- 0.5-16mm²		
-- 18-10AWG	-- 20-6AWG	-- 20-6AWG		
-- --	-- --	-- --		


Screw terminal block-JUT1 series

螺钉式接线端子-JUT1系列


				
JUT1-1.5-GY	JUT1-1.5PE	JUT1-2.5-GY	JUT1-2.5PE	JUT1-2.5B-GY
CE 500V/17.5A 0.14-1.5mm²	CE 500V/17.5A 0.14-1.5mm²	CE 800V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²	CE 690V/24A 0.2-2.5mm²
UL US 300V/10A 26-16AWG	-- 26-16AWG	UL US 600V/20A 24-12AWG	-- 24-12AWG	UL US 600V/20A 24-12AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-2.5B-PE	JUT1-2.5/2-2-GY	JUT1-2.5/2-GY	JUT1-2.5/2L-GY	JUT1-2.5/2Q-GY
CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²
-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	300V/24A 24-12AWG	300V/24A 24-12AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-4-GY	JUT1-4PE	JUT1-4/1-2-GY	JUT1-4/2-2-GY	JUT1-4/2-2PE
CE 800V/32A 0.2-4mm²	CE 500V/32A 0.2-4mm²	CE 500V/32A 0.2-4mm²	CE 690V/32A 0.2-4mm²	CE 690V/32A 0.2-4mm²
UL US 600V/30A 24-10AWG	-- 24-10AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-4K-GY	JUT1-4/2-2K-GY	JUT1-4/2-GY	JUT1-4/2L-GY	JUT1-4/2Q-GY
CE 800V/16A 0.2-4mm²	CE 690V/16A 0.2-4mm²	CE 500V/32A 0.2-4mm²	CE 500V/32A 0.2-4mm²	CE 500V/32A 0.2-4mm²
-- 24-12AWG	-- 24-12AWG	300V/30A 24-12AWG	300V/30A 24-12AWG	300V/30A 24-12AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-4RD	JUT1-6-GY	JUT1-6PE	JUT1-6S-GY	JUT1-10-GY
CE AC 800V 0.2-4mm²	CE 800V/41A 0.2-6mm²	CE 500V/41A 0.2-6mm²	CE 400V/41A 0.5-6mm²	CE 800V/57A 0.5-10mm²
UL US -- 24-12AWG	UL US 600V/40A 24-8AWG	-- 24-8AWG	-- 20-8AWG	UL US 600V/60A 20-6AWG
TP --	TP --	TP --	TP --	TP --

Screw terminal block-JUT1 series

螺钉式接线端子-JUT1系列

				
JUT1-10PE	JUT1-10/2-GY	JUT1-10RD	JUT1-16-GY	JUT1-16PE
CE 500V/57A 0.5-10mm²	CE 500V/57A 0.5-10mm²	CE AC 800V 0.5-10mm²	CE 800V/76A 4-16mm²	CE 500V/76A 4-16mm²
-- 20-6AWG	-- 20-6AWG	UL US -- 20-6AWG	UL US 600V/85A 12-4AWG	-- 12-4AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-35-GY	JUT1-35PE	JUT1-35B-GY	JUT1-35B-PE	JUT1-50-GY
CE 1000V/125A 2.5-35mm²	CE 500V/125A 2.5-35mm²	CE 800V/125A 2.5-35mm²	CE 500V/125A 2.5-35mm²	CE 1000V/150A 25-50mm²
UL US 600V/115A 14-2AWG	-- 14-2AWG	UL US 600V/125A 14-2AWG	-- 14-2AWG	UL US 600V/150A --
TP --	TP --	TP --	TP --	TP --
				
JUT1-50PE	JUT1-95-GY	JUT1-150-GY	JUT1-240-GY	JUT1-2.5E-GY
CE 500V/150A 25-50mm²	CE 1000V/232A 35-95mm²	CE 1000V/308A 50-150mm²	CE 1000V/415A 70-240mm²	CE 380V/24A 0.2-2.5mm²
-- --	UL US 600V/230A --	UL US 600V/285A --	UL US 600V/380A --	-- 24-12AWG
TP --	TP --	TP --	TP --	TP --
				
JUT1-2.5E-PE	JUT1-4E-GY			
CE 500V/24A 0.2-2.5mm²	CE 500V/32A 0.2-4mm²			
-- 24-12AWG	600V/32A 24-12AWG			
TP --	TP --			

Screw terminal block-JUK1 series
螺钉式接线端子-JUK1系列

				
JUK1-1.5-GY	JUK1-1.5PE	JUK1-2.5-GY	JUK1-2.5PE	JUK1-2.5B-GY
CE 500V/17.5A 0.14-1.5mm²	CE -- 0.14-1.5mm²	CE 800V/32A 0.2-2.5mm²	CE -- 0.2-2.5mm²	CE 690V/32A 0.2-2.5mm²
-- 26-16AWG	-- 26-16AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG
-- --	-- --	-- --	-- --	-- --
				
JUK1-2.5B-PE	JUK1-2.5/2-GY	JUK1-2.5/2L-GY	JUK1-2.5/2Q-GY	JUK1-4-GY
CE -- 0.2-2.5mm²	CE 500V/32A 0.2-2.5mm²	CE 500V/32A 0.2-2.5mm²	CE 500V/32A 0.2-2.5mm²	CE 800V/41A 0.2-4mm²
-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-10AWG
-- --	-- --	-- --	-- --	-- --
				
JUK1-4PE	JUK1-4/2-GY	JUK1-4RD	JUK1-6-GY	JUK1-6PE
CE -- 0.2-4mm²	CE 500V/32A 0.2-4mm²	CE AC 800V 0.2-4mm²	CE 800V/57A 0.2-6mm²	CE -- 0.2-6mm²
-- 24-10AWG	-- 24-12AWG	-- 24-12AWG	-- 24-8AWG	-- 24-8AWG
-- --	-- --	-- --	-- --	-- --
				
JUK1-6S-GY	JUK1-10-GY	JUK1-10PE	JUK1-16-GY	JUK1-16PE
CE 400V/57A 0.5-6mm²	CE 800V/76A 0.5-10mm²	CE -- 0.5-10mm²	CE 800V/101A 4-16mm²	CE -- 4-16mm²
-- 20-8AWG	-- 20-6AWG	-- 20-6AWG	-- 12-4AWG	-- 12-4AWG
-- --	-- --	-- --	-- --	-- --
				
JUK1-35-GY	JUK1-35PE	JUK1-50PE		
CE 1000V/105A 0.75-35mm²	CE -- 0.75-35mm²	CE -- 25-50mm²		
-- 18-0AWG	-- 18-0AWG	-- 6-0AWG		
-- --	-- --	-- --		

Screw terminal block-JUT2 series
螺钉式接线端子-JUT2系列

				
JUT2-2.5-CM	JUT2-2.5PE	JUT2-2.5E-CM	JUT2-4-CM	JUT2-4PE
CE 800V/24A 2.5mm²	CE -- 2.5mm²	CE 380V/24A 2.5mm²	CE 800V/32A 4mm²	CE -- 4mm²
UL US -- 24-12AWG	-- 24-12AWG	UL US -- 24-12AWG	UL US -- 24-10AWG	-- 24-10AWG
CE -- --	CE -- --	CE -- --	CE -- --	CE -- --
				
JUT2-4K-CM	JUT2-4/2-CM	JUT2-4/2L-CM	JUT2-4RD-CM	JUT2-6-CM
CE 250V/10A 4mm²	CE 500V/32A 4mm²	CE 500V/32A 4mm²	CE AC 500V 4mm²	CE 800V/32A 6mm²
-- 24-10AWG	UL US -- 24-10AWG	UL US -- 24-10AWG	UL US -- 24-10AWG	UL US -- 24-8AWG
CE -- --	CE -- --	CE -- --	CE -- --	CE -- --
				
JUT2-6PE	JUT2-6S1-CM	JUT2-10-CM	JUT2-10PE	JUT2-16-CM
CE -- 6mm²	CE -- 6mm²	CE 800V/57A 10mm²	CE -- 10mm²	CE 800V/76A 16mm²
-- 24-8AWG	-- 24-8AWG	UL US -- 20-6AWG	-- 20-6AWG	UL US -- 12-4AWG
CE -- --	CE -- --	CE -- --	CE -- --	CE -- --
				
JUT2-16PE	JUT2-35-CM	JUT2-35PE	JUT2-70-CM	JUT2-70PE
CE -- 16mm²	CE 800V/125A 35mm²	CE -- 35mm²	CE 800V/192A 70mm²	CE -- 70mm²
-- 12-4AWG	UL US -- 18-0AWG	-- 18-0AWG	UL US -- 2-2/0AWG	-- 2-2/0AWG
CE -- --	CE -- --	CE -- --	CE -- --	CE -- --

Bigger ampere rating terminal block-JUT10 series
大电流接线端子-JUT10系列

				
JUT10-50-GY	JUT10-50/2-GY	JUT10-50/3-GY	JUT10-95-GY	JUT10-95/2-GY
CE 1000V/160A 16~50mm²	CE 1000V/160A 16~50mm²	CE 1000V/160A 16~50mm²	CE 1000V/245A 16~95mm²	CE 1000V/245A 16~95mm²
-- --	-- --	-- --	-- --	-- --
-- --	-- --	-- --	-- --	-- --

	
JUT10-150-GY	JUT10-240-GY
CE 1000V/320A 50~150mm²	CE 1000V/425A 95~240mm²
-- --	-- --
-- --	-- --

Distribution terminal block-JUT11 series
分线端子-JUT11系列

			
JUT11-80-BE	JUT11-125-BE	JUT11-160-BE	JUT11-250-BE
CE 1000V/80A 600V/85A	CE 1000V/125A 600V/150A	CE 1000V/160A 600V/200A	CE 1000V/250A 600V/255A
Δ 6~16mm² M6 (3N.m/16mm²)	Δ 10~35mm² M10 (10N.m/35mm²)	Δ 10~70mm² M12 (14N.m/70mm²)	Δ 35~120mm² M16 (25N.m/120mm²)
2.5~6mm² M5 (2N.m/6mm²)	2.5~16mm² M6 (3N.m/16mm²)	2.5~16mm² M6 (3N.m/16mm²)	2.5~35mm² M10 (10N.m/35mm²) 2.5~16mm² M8 (6N.m/16mm²) 2.5~10mm² M6 (3N.m/10mm²)

			
JUT11-400-BE	JUT11-500-BE	JUT11-200/1-8-GY	JUT11-200/1-9-GY
CE 1000V/400A 600V/335A	CE 1000V/500A 600V/520A	CE 660V/240A --	CE 660V/240A --
Δ 95~185mm² M20 (25N.m/185mm²)	Δ 50~185mm² M10 (10N.m/35/185mm²)	Δ 16~120mm² M10 (4.4N.m/150mm²)	Δ 16~120mm² M10 (4.4N.m/150mm²)
2.5~35mm² M10 (10N.m/35mm²) UL 2.5~16mm² M8 (6N.m/16mm²) 2.5~10mm² M6 (3N.m/10mm²)	2.5~35mm² M10 (10N.m/35mm²) 2.5~16mm² M8 (6N.m/16mm²) 2.5~10mm² M6 (3N.m/10mm²)	2.5~16mm² M6 (2.8N.m/16mm²)	2.5~16mm² M6 (2.8N.m/16mm²)


Distribution terminal block-JUT13 series
分线端子-JUT13系列

	
JUT13-35-GY	JUT13-95-GY
CE 800V/125A 10~35mm²	CE 800V/230A 16~95mm²
-- 8-2AWG	-- 6-3/0AWG
-- --	-- --

Terminal connection-JUT17 series
端子连接器-JUT17系列

				
JUT17-25-GY	JUT17-50-GY	JUT17-95-GY	JUT17-150-GY	JUT17-240-GY
CE 1000V/100A 10~25mm²	CE 1000V/150A 20~50mm²	CE 1000V/200A 50~95mm²	CE 1000V/275A 95~150mm²	CE 1000V/400A 150~240mm²
-- --	-- --	-- --	-- --	-- --
-- --	-- --	-- --	-- --	-- --

Bigger ampere rating terminal block-JUT5 series
大电流分接端子-JUT5系列

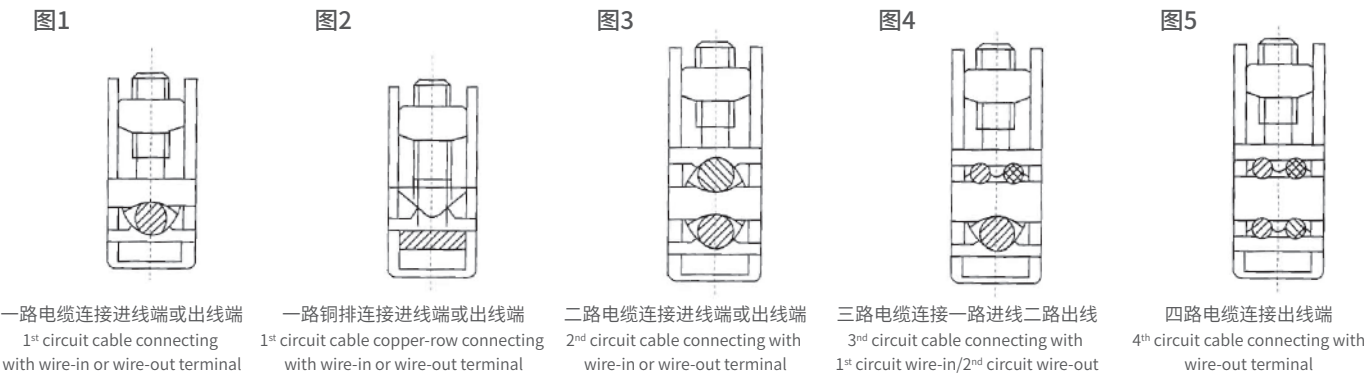

额定参数 Rated parameter
电压/电流 Voltage/current:1000 (V) /160 (A)
接线容量 16-95(mm²)
Wiring capacity:A.W.G 4-000
安装螺钉Installment screw:M5(mm)


型号 Model	形式 Mould	已上线范围 (mm²) Wire-pressing scope (mm²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)
JUT5-95-WT	一路进(电缆)一路出(电缆)图1 1 st circuit in (cable) 1 st circuit out(cable)	16-95	31 × N+9/115/76(93)
JUT5-95B-WT	一路进(铜排)一路出(铜排)图2 1 st circuit in (copper row) 1 st circuit out(copper row)	铜排宽≤18 copper-plate's width≤18	31 × N+9/115/76(93)
JUT5-95C-WT	一路进(铜排)一路出(电缆)图2.图1 1 st circuit in (copper row) 1 circuit ol ut(cable)	进(宽≤18)出16-95 in (width≤18)out 16-95	31 × N+9/115/76(93)
JUT5-95D-WT	一路进(电缆)二路出(电缆)图1.图3 1 st circuit in (cable) 2 nd circuit out(cable)	进16-95出16-50 In 16-95 out 16-50	31 × N+9/115/76(105)



额定参数 Rated parameter
电压/电流 Voltage/current:1000 (V) /250 (A)
接线容量 25-150(mm²)
Wiring capacity:A.W.G 2-300
安装螺钉Installment screw:M5(mm)

型号 Model	形式 Mould	已上线范围 (mm²) Wire-pressing scope (mm²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)
JUT5-150-WT	一路进(电缆)一路出(电缆)图1 1 st circuit in (cable) 1 st circuit out(cable)	25-150	31 × N+9/115/88(105)
JUT5-150B-WT	一路进(铜排)一路出(铜排)图2 1 st circuit in (copper row) 1 st circuit out(copper row)	铜排宽≤18 copper-plate's width≤18	31 × N+9/115/88(105)
JUT5-150C-WT	一路进(铜排)一路出(电缆)图2.图1 1 st circuit in (copper row) 1 circuit ol ut(cable)	进(宽≤18)出25-150 in (width≤18)out 25-150	31 × N+9/115/88(105)
JUT5-150D-WT	一路进(电缆)二路出(电缆)图1.图3 1 st circuit in (cable) 2 nd circuit out(cable)	进25-150出16-70 In 16-95 out 16-70	31 × N+9/115/103(120)

Bigger ampere rating terminal block-JUT5 series
大电流分接端子-JUT5系列

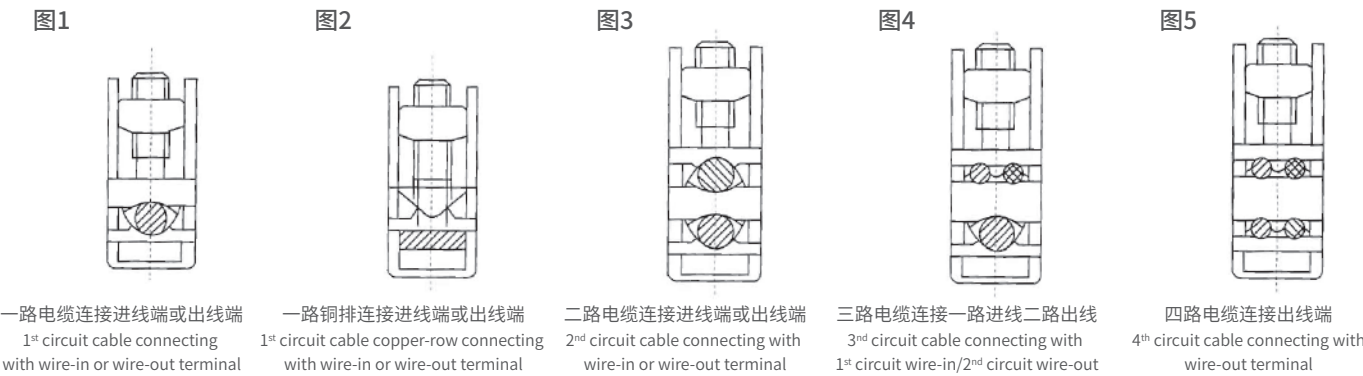

额定参数 Rated parameter
电压/电流 Voltage/current:1000 (V) /400 (A)
接线容量 35-240(mm²)
Wiring capacity:A.W.G 2-400MCM
安装螺钉Installment screw:M6(mm)

型号 Model	形式 Mould	已上线范围 (mm²) Wire-pressing scope (mm²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)
JUT5-240-WT	一路进(电缆)一路出(电缆)图1 1 st circuit in (cable) 1 st circuit out(cable)	35-240	46 × N+9/115/103(120)
JUT5-240B-WT	一路进(铜排)一路出(铜排)图2 1 st circuit in (copper row) 1 st circuit out(copper row)	铜排宽≤25 copper-plate's width≤25	46 × N+9/115/103(120)
JUT5-240C-WT	一路进(铜排)一路出(电缆)图2.图1 1 st circuit in (copper row) 1 circuit ol ut(cable)	进(宽≤18)出355-240 in (width≤18)out 35-240	46 × N+9/115/103(120)
JUT5-240D-WT	一路进(电缆)二路出(电缆)图1.图3 1 st circuit in (cable) 2 nd circuit out(cable)	进35-240出35-240 In 35-240 out 35-240	62 × N+9/140/110(127)




额定参数 Rated parameter
电压/电流 Voltage/current:1000 (V) /630 (A)
接线容量 50-300(mm²)
Wiring capacity:A.W.G 1-500MCM
安装螺钉Installment screw:M6(mm)

型号 Model	形式 Mould	已上线范围 (mm²) Wire-pressing scope (mm²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)
JUT5-300-WT	一路进(电缆)一路出(电缆)图1 1 st circuit in (cable) 1 st circuit out(cable)	50-300	62 × N+10/140/110(127)
JUT5-300B-WT	一路进(铜排)一路出(铜排)图2 1 st circuit in (copper row) 1 st circuit out(copper row)	铜排宽≤30 copper-plate's width≤30	62 × N+10/140/110(127)
JUT5-300C-WT	一路进(铜排)一路出(电缆)图2.图1 1 st circuit in (copper row) 1 circuit ol ut(cable)	进(宽≤30)出50-300 in (width≤30)out 50-300	62 × N+10/140/110(127)
JUT5-300D-WT	一路进(电缆)二路出(电缆)图1.图3 1 st circuit in (cable) 2 nd circuit out(cable)	进50-300出25-150 In 50-300 out 25-150	72 × N+9/140/137(166)






Grid type terminal block-JUT6、JUT7 series
栅型端子-JUT6、JUT7系列

				
JUT6-603-BK	JUT6-604-BK	JUT6-1003-BK	JUT6-1004-BK	JUT6-1503-BK
CE 690V/76A 3/16mm²	CE 690V/76A 4/16mm²	CE 690V/101A 3/25mm²	CE 690V/101A 4/25mm²	CE 690V/150A 3/50mm²
-- AWG:6	-- AWG:6	-- AWG:4	-- AWG:4	-- AWG:0
--	--	--	--	--
				
JUT6-1504-BK	JUT6-2003-BK	JUT6-2004-BK	JUT6-3003-BK	JUT6-3004-BK
CE 690V/150A 4/50mm²	CE 690V/232A 3/120mm²	CE 690V/232A 4/120mm²	CE 690V/309A 3/150mm²	CE 690V/309A 4/150mm²
-- AWG:0	-- AWG:250MCM	-- AWG:250MCM	-- AWG:300MCM	-- AWG:300MCM
--	--	--	--	--
				
JUT6-4003-BK	JUT6-4004-BK	JUT7-2.5/2C-BK	JUT7-2.5/3C-BK	JUT7-4/3C-BK
CE 690V/415A 3/240mm²	CE 690V/415A 4/240mm²	CE 690V/24A 2/2.5mm²	CE 690V/24A 3/2.5mm²	CE 690V/32A 3/4mm²
-- AWG:500MCM	-- AWG:500MCM	-- AWG:14	-- AWG:14	-- AWG:12
--	--	--	--	--
				
JUT7-6/3C-BK	JUT7-10C-BK	JUT7-16C-BK	JUT7-35C-BK	JUT7-95C-BK
CE 690V/41A 3/6mm²	CE 690V/57A --/10mm²	CE 690V/76A --/16mm²	CE 690V/125A 3/4mm²	CE 690V/232A 3/6mm²
-- AWG:10	-- AWG:8	-- AWG:6	-- AWG:12	-- AWG:10
--	--	--	--	--
				
JUT7-105C-BK				
CE 690V/309A --/150mm²				
-- AWG:300MVM				
--				





Push-in terminal block-UPT series
直插式接线端子-UPT系列

				
UPT-1.5-GY	UPT-1.5PE	UPT-1.5/1-2-GY	UPT-1.5/1-2PE	UPT-1.5/2-2-GY
CE 50V/17.5A 0.2-1.5mm²	CE -- 0.2-1.5mm²	CE 500V/17.5A 0.2-1.5mm²	CE -- 0.2-1.5mm²	CE 500V/17.5A 0.2-1.5mm²
UL US 300V/15A 26-14AWG	UL US -- 26-14AWG	UL US 300V/15A 26-14AWG	UL US -- 26-14AWG	UL US 300V/15A 26-14AWG
Δ --	Δ --	Δ --	Δ --	Δ --
				
UPT-1.5/2-2PE	UPT-1.5/2-GY	UPT-1.5/2L-GY	UPT-1.5/2PE	UPT-1.5/2K-GY
CE -- 0.2-1.5mm²	CE 500V/16A 0.2-1.5mm²	CE 500V/16A 0.2-1.5mm²	CE -- 0.2-1.5mm²	CE 400V/9A 0.2-1.5mm²
UL US -- 26-14AWG	UL US 300V/15A 26-14AWG	UL US 300V/15A 26-14AWG	UL US -- 26-14AWG	UL US 300V/10A 26-14AWG
Δ --	Δ --	Δ --	Δ --	Δ --
				
UPT-1.5/3-GY	UPT-1.5/3L-GY	UPT-1.5/3PE	UPT-1.5PE/L/L-GY	UPT-1.5PE/L/N-GY
CE 500V/15A 0.2-1.5mm²	CE 500V/15A 0.2-1.5mm²	CE -- 0.2-1.5mm²	CE 500V/15A 0.2-1.5mm²	CE 500V/15A 0.2-1.5mm²
UL US 300V/15A 26-14AWG	UL US 300V/15A 26-14AWG	UL US -- 26-14AWG	UL US 300V/15A 26-14AWG	UL US 300V/15A 26-14AWG
Δ --	Δ --	Δ --	Δ --	Δ --
				
UPT-2.5-GY	UPT-2.5PE	UPT-2.5/1-2-GY	UPT-2.5/1-2PE	UPT-2.5/2-2-GY
CE 800V/24A 0.2-4mm²	CE -- 0.2-4mm²	CE 800V/24A 0.2-4mm²	CE -- 0.2-4mm²	CE 800V/24A 0.2-4mm²
UL US 600V/20A 26-12AWG	UL US -- 26-12AWG	UL US 600V/20A 26-12AWG	UL US -- 26-12AWG	UL US 600V/20A 26-12AWG
Δ --	Δ --	Δ --	Δ --	Δ --
				
UPT-2.5/2-2PE	UPT-2.5K-GY	UPT-2.5/1-2K-GY	UPT-2.5/2-GY	UPT-2.5/2L-GY
CE -- 0.2-4mm²	CE 400V/20A 0.2-4mm²	CE 400V/20A 0.2-4mm²	CE 500V/22A 0.2-4mm²	CE 500V/22A 0.2-4mm²
UL US -- 26-12AWG	UL US 300V/20A 26-12AWG	UL US 300V/20A 26-12AWG	UL US 300V/20A 26-12AWG	UL US 300V/20A 26-12AWG
Δ --	Δ --	Δ --	Δ --	Δ --


Push-in terminal block-UPT series
直插式接线端子-UPT系列

				
UPT-2.5/2PE	UPT-2.5/3-GY	UPT-2.5/3L-GY	UPT-2.5/3PE	UPT-2.5PE/L/L-GY
CE -- 0.2-4mm²	CE 500V/20A 0.2-4mm²	CE 500V/20A 0.2-4mm²	CE -- 0.2-4mm²	CE 500V/20A 0.2-4mm²
cULus -- 26-12AWG	cULus 300V/20A 26-12AWG	cULus 300V/20A 26-12AWG	cULus -- 26-12AWG	cULus 300V/20A 26-12AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-2.5PE/L/N-GY	UPT-2.5-PE/3L-GY	UPT-2.5/1P-GY	UPP-H2.5-GY	UPP-H2.5/N-GY
CE 500V/20A 0.2-4mm²	CE 800V/20A 0.2-4mm²	CE 500V/24A 0.2-4mm²	CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²
cULus 300V/20A 26-12AWG	-- 26-12AWG	cULus 300V/20A 26-12AWG	cULus 300V/20A 26-12AWG	cULus 300V/20A 26-12AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-4-GY	UPT-4PE	UPT-4/1-2-GY	UPT-4/1-2PE	UPT-4/2-2-GY
CE 800V/32A 0.2-6mm²	CE -- 0.2-6mm²	CE 800V/32A 0.2-6mm²	CE -- 0.2-6mm²	CE 800V/32A 0.2-6mm²
cULus 600V/30A 24-10AWG	cULus -- 24-10AWG	cULus 600V/30A 24-10AWG	cULus -- 24-10AWG	cULus 600V/30A 24-10AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-4/2-2PE	UPT-4/2-GY	UPT-4/2L-GY	UPT-4/2PE	UPT-4RD
CE -- 0.2-6mm²	CE 500V/28A 0.2-6mm²	CE 500V/30A 0.2-6mm²	CE -- 0.2-6mm²	CE 500V/6.3A 0.2-6mm²
cULus -- 24-10AWG	cULus 300V/28A 24-10AWG	cULus 300V/30A 24-10AWG	cULus -- 24-10AWG	cULus 300V/6.3A 24-10AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-4RD/LED24	UPT-4RD/LED60	UPT-4RD/LA250	UPT-4RD/C	UPT-4RD/C/LED24
CE 24V/6.3A 0.2-6mm²	CE 60V/6.3A 0.2-6mm²	CE 250V/6.3A 0.2-6mm²	CE 500V/6.3A 0.2-6mm²	CE 24V/6.3A 0.2-6mm²
cULus 300V/6.3A 24-10AWG	cULus 300V/6.3A 24-10AWG	cULus 300V/6.3A 24-10AWG	cULus 300V/6.3A 24-10AWG	cULus 300V/6.3A 24-10AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --

Push-in terminal block-UPT series
直插式接线端子-UPT系列

				
UPT-4RD/C/LED60	UPT-4RD/C/LA250	UPT-6-GY	UPT-6PE	UPT-6/1-2-GY
CE 60V/6.3A 0.2-6mm²	CE 250V/6.3A 0.2-6mm²	CE 1000V/41A 0.5-10mm²	CE -- 0.5-10mm²	CE 1000V/41A 0.5-10mm²
cULus 300V/6.3A 24-10AWG	cULus 300V/6.3A 24-10AWG	cULus 600V/40A 20-8AWG	cULus -- 20-8AWG	cULus 600V/40A 20-8AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-6/1-2PE	UPT-6/2-2-GY	UPT-6/2-2PE	UPT-10-GY	UPT-10PE
CE -- 0.5-10mm²	CE 1000V/41A 0.5-10mm²	CE -- 0.5-10mm²	CE 1000V/57A 0.5-16mm²	CE -- 0.5-16mm²
cULus -- 20-8AWG	cULus 600V/40A 20-8AWG	cULus -- 20-8AWG	cULus 600V/60A 20-6AWG	cULus -- 20-6AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-10/1-2-GY	UPT-10/1-2PE	UPT-16-GY	UPT-16PE	UPT-16/1-2-GY
CE 1000V/57A 0.5-16mm²	CE -- 0.5-16mm²	CE 1000V/76A 0.5-25mm²	CE -- 0.5-25mm²	CE 1000V/76A 0.5-25mm²
cULus 600V/60A 20-6AWG	cULus -- 20-6AWG	cULus 600V/85A 20-4AWG	cULus -- 20-4AWG	cULus -- 20-4AWG
Δ -- --	Δ -- --	Δ -- --	Δ -- --	Δ -- --
				
UPT-16/1-2PE				
CE -- 0.5-25mm²				
cULus -- 20-4AWG				
Δ -- --				





Push-in terminal block-JUT15 series
直插式接线端子-JUT15系列

		
JUT15-2×2.5-GY (平行导轨)	JUT15-2×2.5-GY (垂直导轨)	JUT15-4×2.5-GY (平行导轨)
CE -- --	CE -- --	CE -- --
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-4×2.5-GY (垂直导轨)	JUT15-6-4×2.5-GY (平行导轨)	JUT15-6-4×2.5-GY (垂直导轨)
CE -- --	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-6×2.5-GY (平行导轨)	JUT15-6×2.5-GY (垂直导轨)	JUT15-6-6×2.5-GY (平行导轨)
CE -- --	CE -- --	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-6-6×2.5-GY (垂直导轨)	JUT15-10×2.5-GY (平行导轨)	JUT15-10×2.5-GY (垂直导轨)
CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	CE -- --	CE -- --
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-6-10×2.5-GY (平行导轨)	JUT15-6-10×2.5-GY (垂直导轨)	JUT15-12×2.5-GY (平行导轨)
CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	CE -- --
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG





Push-in terminal block-JUT15 series
直插式接线端子-JUT15系列

		
JUT15-12×2.5-GY (垂直导轨)	JUT15-6-12×2.5-GY (平行导轨)	JUT15-6-12×2.5-GY (垂直导轨)
CE -- --	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-18×2.5-GY (平行导轨)	JUT15-18×2.5-GY (垂直导轨)	JUT15-6-18×2.5-GY (平行导轨)
CE -- --	CE -- --	CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG
		
JUT15-6-18×2.5-GY (垂直导轨)	F-NS35	PAD-NS15/35
CE 690V/41A 0.5-10/0.5-6mm² 20-8/20-10AWG	-- --	-- --
Δ 690V/24A 0.2-4/0.2-2.5mm² 26-12/26-14AWG	-- --	-- --
		
JUT15-F		
-- --		
-- --		




Push-in terminal block-JUT14 series
直插式接线端子-JUT14系列

				
JUT14-1.5-DK/GY	JUT14-1.5PE	JUT14-1.5/2-2-DK/GY	JUT14-2.5-DK/GY	JUT14-2.5PE
CE 800V/17.5A 0.2-1.5mm²	CE -- 0.2-1.5mm²	CE 600V/15A 0.2-1.5mm²	CE 800V/24A 0.2-2.5mm²	CE -- 0.2-2.5mm²
UL 600V/15A 24-14AWG	UL -- 24-14AWG	UL 600V/15A 24-14AWG	UL 600V/20A 24-14AWG	UL -- 24-14AWG
-- --	-- --	-- --	-- --	-- --
				
JUT14-2.5/1-2-DK/GY	JUT14-2.5/1-2PE	JUT14-2.5/2-2-DK/GY	JUT14-2.5/2-2PE	JUT14-2.5/2-DK/GY
CE 800V/24A 0.2-2.5mm²	CE -- 0.2-2.5mm²	CE 800V/24A 0.2-2.5mm²	CE -- 0.2-2.5mm²	CE 800V/24A 0.2-2.5mm²
UL 600V/20A 24-14AWG	UL -- 24-14AWG	UL 600V/20A 24-14AWG	UL -- 24-14AWG	UL 600V/20A 24-12AWG
-- --	-- --	-- --	-- --	-- --
				
JUT14-2.5/3-DK/GY	JUT14-4-DK/GY	JUT14-4PE	JUT14-4/1-2-DK/GY	JUT14-4/1-2PE
CE 800V/24A 0.2-2.5mm²	CE 800V/32A 0.2-4mm²	CE -- 0.2-4mm²	CE 800V/32A 0.2-4mm²	CE -- 0.2-4mm²
UL 600V/20A 24-12AWG	UL 600V/30A 24-10AWG	UL -- 24-10AWG	UL 600V/30A 24-12AWG	UL -- 24-12AWG
-- --	-- --	-- --	-- --	-- --
				
JUT14-4/2-2-DK/GY	JUT14-4/2-2PE	JUT14-4/2-DK/GY	JUT14-6-DK/GY	JUT14-6PE
CE 800V/32A 0.2-4mm²	CE -- 0.2-4mm²	CE 800V/32A 0.2-4mm²	CE 800V/32A 0.5-6mm²	CE -- 0.5-6mm²
UL 600V/30A 24-10AWG	UL -- 24-10AWG	UL 600V/30A 24-10AWG	UL 600V/40A 24-8AWG	UL 600V/40A 24-8AWG
-- --	-- --	-- --	-- --	-- --
				
JUT14-6/1-2-DK/GY	JUT14-6/1-2PE	JUT14-10-DK/GY	JUT14-10PE	
CE 800V/40A 0.5-6mm²	CE -- 0.5-6mm²	CE 800V/57A 0.5-10mm²	CE -- 0.5-10mm²	
UL 600V/40A 24-8AWG	UL -- 24-8AWG	UL 600V/57A 16-6AWG	UL -- 16-6AWG	
-- --	-- --	-- --	-- --	

Spring-cage terminal block-JUT3 series
回拉式弹簧接线端子-JUT3系列

				
JUT3-1.5-GY	JUT3-1.5PE	JUT3-1.5/1-2-GY	JUT3-1.5/1-2PE	JUT3-1.5/2-2-GY
CE 500V/17.5A 0.14-1.5mm²	CE -- 0.14-1.5mm²	CE 500V/17.5A 0.14-1.5mm²	CE -- 0.14-1.5mm²	CE 500V/17.5A 0.14-1.5mm²
UL 600V/10A 26-16AWG	-- 26-16AWG	-- 26-16AWG	-- 26-16AWG	-- 26-16AWG
UL -- --	UL -- --	UL -- --	UL -- --	UL -- --
				
JUT3-1.5/2-2PE	JUT3-1.5/2-GY	JUT3-2.5-GY	JUT3-2.5PE	JUT3-2.5/1-2-GY
CE -- 0.14-1.5mm²	CE 500V/17.5A 0.14-1.5mm²	CE 800V/31A 0.2-2.5mm²	CE -- 0.2-2.5mm²	CE 800V/24A 0.2-2.5mm²
-- 26-16AWG	-- 26-16AWG	UL 600V/20A 24-12AWG	-- 24-12AWG	-- 24-12AWG
-- --	UL -- --	UL -- --	UL -- --	UL -- --
				
JUT3-2.5/1-2PE	JUT3-2.5/2-2-GY	JUT3-2.5/2-2PE	JUT3-2.5/2-GY	JUT3-2.5/2L-GY
CE -- 0.2-2.5mm²	CE 800V/24A 0.2-2.5mm²	CE -- 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²	CE 500V/24A 0.2-2.5mm²
-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG	-- 24-12AWG
-- --	UL -- --	UL -- --	-- --	-- --
				
JUT3-2.5/3-GY	JUT3-2.5/2-2X-GY	JUT3-4-GY	JUT3-4PE	JUT3-4/1-2-GY
CE 500V/24A 0.2-2.5mm²	CE 660V/24A 0.2-2.5mm²	CE 800V/41A 0.5-4mm²	CE -- 0.5-4mm²	CE 800V/32A 0.5-4mm²
-- 24-12AWG	-- 24-12AWG	UL 600V/30A 24-10AWG	-- 24-10AWG	-- 24-10AWG
-- --	-- --	UL -- --	UL -- --	-- --
				
JUT3-4/1-2PE	JUT3-4/2-2-GY	JUT3-4/2-2PE	JUT3-4/2-GY	JUT3-6-GY
CE -- 0.5-4mm²	CE 800V/40A 0.5-4mm²	CE -- 0.5-4mm²	CE 500V/32A 0.5-4mm²	CE 800V/57A 0.5-6mm²
-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	-- 24-10AWG	UL 600V/40A 24-8AWG
UL -- --	UL -- --	-- --	UL -- --	UL -- --

Spring-cage terminal block-JUT3 series
回拉式弹簧接线端子-JUT3系列

				
JUT3-6PE	JUT3-6/1-2-GY	JUT3-6/1-2PE	JUT3-10-GY	JUT3-10PE
CE -- 0.5-6mm²	CE 800V/40A 0.5-6mm²	CE -- 0.5-6mm²	CE 1000V/57A 0.08-10mm²	CE -- 0.08-10mm²
-- 24-8AWG	-- 24-8AWG	-- 24-8AWG	-- 16-6AWG	-- 16-6AWG
RoHS --	--	--	--	--
				
JUT3-16-GY	JUT3-16PE	JUT3-35-GY	JUT3-35PE	JUT3-1.5W-GY
CE 1000V/76A 1.5-16mm²	CE -- 1.5-16mm²	CE 1000V/125A 2.5-35mm²	CE -- 2.5-35mm²	CE 500V/17.5A 0.08-1.5mm²
-- 16-4AWG	-- 16-4AWG	-- 14-2AWG	-- 14-2AWG	--
--	--	--	--	--
				
JUT3-2.5W-GY	JUT3-4W-GY	JUT3-6W-GY	JUT3-10W-GY	JUT3-1.5F-GY
CE 800V/24A 0.08-2.5mm²	CE 800V/32A 0.08-4mm²	CE 800V/41A 0.08-6mm²	CE 800V/57A 0.08-10mm²	CE 400V/18A 0.8-1.5mm²
-- 24-12AWG	-- 24-10AWG	-- 24-8AWG	-- 16-6AWG	UL 600V/10A 18-16AWG
RoHS --	RoHS --	--	RoHS --	RoHS --
				
JUT3-2.5F-GY	JUT3-2.5F/2-GY	JUT3-4F-GY		
CE 500V/24A 0.8-2.5mm²	CE 500V/24A 0.8-2.5mm²	CE 690V/30A 0.8-4mm²		
UL 600V/20A 18-12AWG	-- 24-12AWG	UL 600V/30A 24-10AWG		
RoHS --	RoHS --	RoHS --		

End plate
端板

				
G-UUT-2.5/10	G-UUT-2.5(4)/1-2	G-UUT-2.5(4)/2-2	G-UUT-2.5(4)/2	DP-UUT-2.5(4)/2
				
G-UUT-16	G-JUT1-2.5S	G-JUT1-2.5/4	G-JUT1-2.5/10	G-JUT1-2.5/4Q
				
DP-JUT1-2.5/4Q	G-JUT1-4/1-2	G-JUT1-4/2-2	G-JUT1-6S	G-JUT2-2.5
				
G-JUT2-4/2	G-JUT2-4/10	G-JUT2-4RD	G-JUT2-6S1	G-JUT2-16
				
G-JUT2-35	G-UPT-2.5/2	G-UPT-2.5/2-2	G-UPT-2.5	G-UPT-4

End plate

端板



JUT3-1.5/2.5



JUT3-2.5/2



JUT3-2.5/1-2



G-JUT3-2.5/2-2



G-JUT3-4



G-JUT3-3-4/2-2

Insulating spacer

绝缘隔片



JS-K



JS-KK3



ST2.5/35

Grouping partition

分组隔板



JAP



JAP-6S



TW



TW2.5



TW4/10

Panel Mark

板式标记条



UCT-TM5



DEK5



ZBFM4



ZBFM5



ZBFM6

Mark bar

标记条



ZB4



ZB5



ZB6



ZB8



ZB10

Mark terminal

标记端子



JUT1-B



JUT4-B



JUT2-3B



JUT2-5B

Mark clip

标记夹



KLM-A

Plug-in bridge connection
插拔式桥接件




Central adaptor
中心联络件




Side adaptor
边插式联络件

Guide rail
DIN导轨

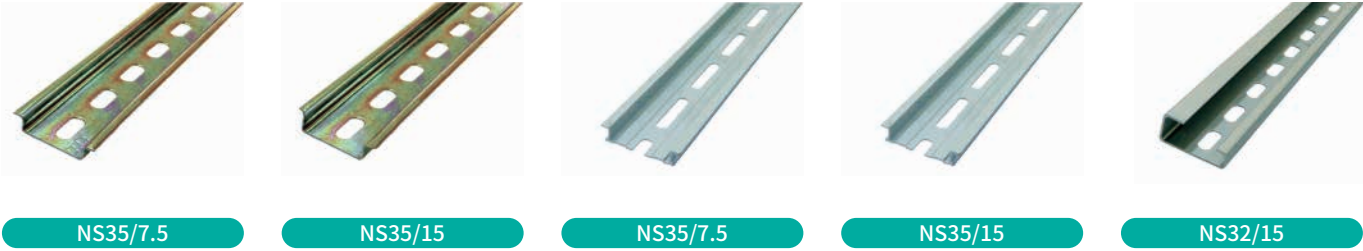


导轨切割机
特点:设计新颖,结构合理、省力、特殊设计的刀模,使切断面平整、无毛刺。
用途:适用于钢或铝合金材质导轨的切断作业。
The properties of guide-track cut-off machine: creatable/new design,rational structure,economizing labor, the knife-model of special designcan mak cutting surface and non-rag.
Usage: used for cutting operation of steel or Al alloy guide track.

End clamp
终端固定件

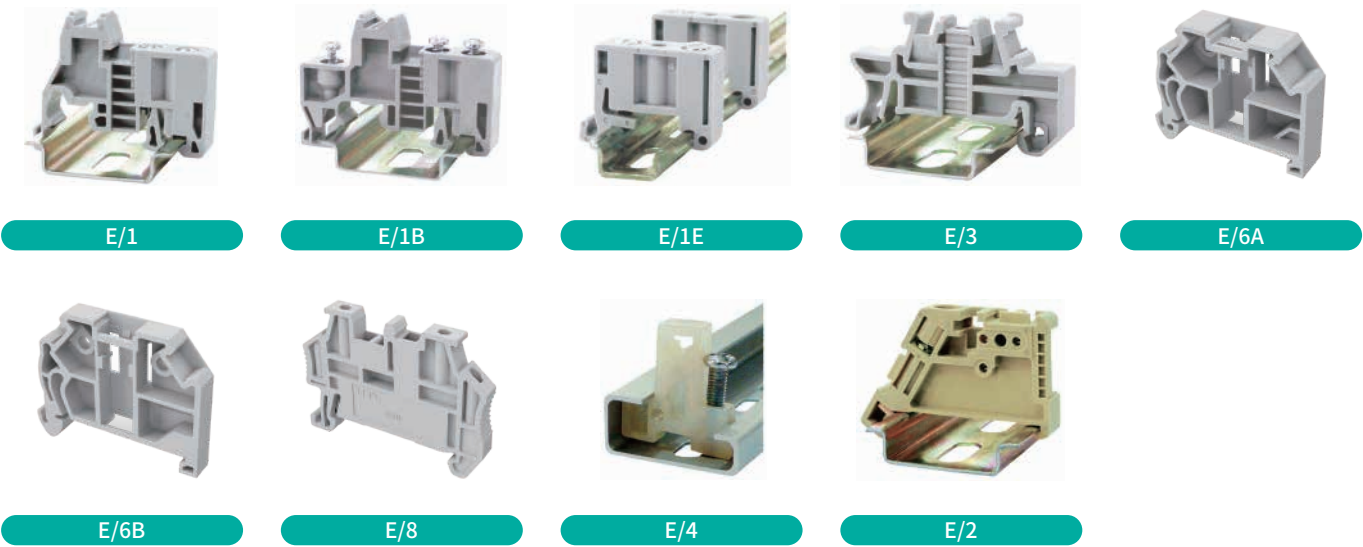

PCB terminal block

PCB接线端子

				
MU0.5H2.54	MU0.5SP/HD2.54	MU0.5SP/VD2.54	MU1.0H3.5(3.81)	MU1.0H2L3.5
CE 125V/6A 30-20AWG	CE 125V/6A 30-20AWG	CE 125V/6A 30-20AWG	CE 150V/10A 30-16AWG	CE 150V/10A 30-16AWG
UL 125V/6A 0.2-0.5mm²	UL 50V/6A 0.5mm²	UL 50V/6A 0.5mm²	UL 300V/10A 0.2-1.0mm²	UL 300V/10A 0.2-1.0mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...16P	Pole 2P...24P	Pole 2P...24P	Pole 2P...16P	Pole 2P...16P


				
MU1.5H3.81	MU1.5H5.0(5.08)	MU1.5HM5.0(5.08)	MU1.5V5.0	MU1.5VR5.0
CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG
UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...16P	Pole 2P...24P	Pole 2P...4P	Pole 2P...24P	Pole 2P...24P


				
MU1.5VR5.08	MU1.5HS5.0(5.08)	MU1.5AS5.0(5.08)	MU1.5VR7.62	MU1.5H7.62
CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG
UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/17.5A 1.5mm²	UL 300V/15A 0.2-1.5mm²
--	--	--	CE --	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

				
MU1.5HM7.62	MU1.5HM2L5.0(5.08)	MU1.5H2L5.0(5.08)	MU1.5H3L5.0(5.08)	MU1.5HB5.0(5.08)
CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG
UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/17.5A 1.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

PCB terminal block

PCB接线端子

				
MU1.5P/H5.0(5.08)	MU1.5P/V5.0(5.08)	MU1.5SP/HD3.81	MU1.5SP/AD3.5	MU1.5SP/A3.5
CE 300V/15A 30-14AWG	CE 300V/15A 30-14AWG	CE 300V/7A 22-16AWG	CE 300V/7A 30-16AWG	CE 300V/7A 30-16AWG
UL 300V/15A 0.2-1.5mm²	UL 300V/15A 0.2-1.5mm²	UL 300V/10A 30-16AWG	UL 300V/17.5A 0.2-1.5mm²	UL 300V/17.5A 0.2-1.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...16P


				
MU1.5SP/HD5.08	MU1.5SP/VD5.08	MU1.5CG/AD5.0(5.08)	MU1.5A/5.08	MU2.5H5.0(5.08)
UL 300V/7A 30-16AWG	CE 300V/7A 30-16AWG	CE 300V/15A 28-12AWG	CE 300V/15A 30-14AWG	CE 300V/20A 30-12AWG
UL 300V/10A 30-16AWG	UL 300V/10A 30-16AWG	UL 300V/10A 24-14AWG	UL 300V/15A 30-16AWG	UL 300V/20A 0.2-2.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

				
MU2.5H7.62	MU2.5VR5.0(5.08)	MU2.5VR7.62	MU2.5H2L5.0(5.08)	MU2.5H3L5.0(5.08)
CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG
UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

				
MU2.5VR5.0(5.08)	MU2.5H2/5.08	MU2.5CA/H5.0	MU2.5CA/H10.0	MU2.5CA/V5.0
CE 300V/30A 28-10AWG	CE 300V/24A 2.5mm²	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG
UL 300V/30A 0.2-4mm²	UL 300V/24A 2.5mm²	UL -- --	-- --	UL -- --
UL --	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P






PCB terminal block

PCB接线端子

				
MU2.5CA/10.0	MU2.5P/H5.0	MU2.5P/H7.5	MU2.5P/V5.0	MU2.5P/V7.5
CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/20A 30-12AWG
--	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MU2.5SP/HD5.08	MU2.5VF5.0(5.08)	MU4H6.35	MU4H7.62	MU10H10.16
CE 300V/10A 28-12AWG	UL 300V/20A 30-12AWG	CE 300V/30A 28-10AWG	CE 300V/30A 28-10AWG	CE 300V/57A 20-6AWG
UL 300V/20A 30-12AWG	CE 300V/20A 0.2-2.5mm²	UL 300V/20A 0.2-4mm²	UL 300V/20A 0.2-4mm²	UL 300V/30A 0.2-10mm²
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MU16H10.16	MA1.5/H3.50(3.81)	MA1.5/HF3.50(3.81)	MA1.5/V3.50(3.81)	MA1.5/VF3.50(3.81)
CE 300V/30A 0.2-6mm²	CE 300V/10A 30-14AWG	CE 300V/10A 30-16AWG	CE 300V/10A 30-16AWG	CE 300V/10A 30-16AWG
CE 800V/76A 16mm²	UL 300V/8A 0.2-1.5mm²	UL 300V/8A 0.2-1.5mm²	UL 300V/8A 0.2-1.5mm²	UL 300V/8A 0.2-1.5mm²
--	CE --	CE --	CE --	CE --
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MA1.5/VR3.50(3.81)	MA1.5/VRF3.50(3.81)	MA1.5CA/H3.81	MA1.5CA/HF3.81	MA1.5SP/H3.81
CE 300V/10A 30-16AWG	CE 300V/10A 30-16AWG	CE 300V/8A 30-16AWG	CE 300V/8A 30-16AWG	CE 300V/8A 30-16AWG
UL 300V/8A 0.2-1.5mm²	UL 300V/8A 0.2-1.5mm²	--	UL --	--
CE --	CE --	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P


PCB terminal block

PCB接线端子

				
MA1.5SP/HF3.81	MA2.5/H5.0(5.08)	MA2.5/H7.62	MA2.5/HF5.0(5.08)	MA2.5/HF7.62
CE 300V/8A 30-16AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG
--	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²
--	CE --	CE --	CE --	CE --
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MA2.5/V5.0(5.08)	MA2.5/V7.62	MA2.5/VF5.0(5.08)	MA2.5/VF7.62	MA2.5/VR5.0(5.08)
CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/20A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG
UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/20A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²
CE --	CE --	--	CE --	CE --
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MA2.5/VR7.62	MA2.5/VRF5.0(5.08)	MA2.5/VRF7.62	MA2.5I/H5.08	MA2.5I/F5.08
CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG
UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²	UL 300V/18A 0.2-2.5mm²
CE --	CE --	CE --	CE --	CE --
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MA2.5I/N5.08	MA2.5/A5.08	MA2.5/AF5.08	MA2.5/H7.50	MA2.5/HF7.50
CE 300V/18A 30-12AWG	UL 300V/18A 30-12AWG	UL 300V/18A 30-12AWG	CE 300V/18A 30-12AWG	CE 300V/18A 30-12AWG
UL 300V/18A 0.2-2.5mm²	--	--	UL --	UL --
CE --	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P


PCB terminal block

PCB接线端子

				
MA2.5CA/H5.0(5.08)	MA2.5CA/HF5.0(5.08)	MA2.5SP/H5.0(5.08)	MA2.5SP/HF5.0(5.08)	MA2.5CGI/H5.0
300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG
300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 28-12AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MA2.5CGI/HF5.0	MA2.5CG/H5.0	MA2.5CG/HF5.0	MA2.5CG/H5.0-M1	MA2.5CG/HF5.0-M1
300V/18A 30-12AWG	300V/18A 30-12AWG	300V/18A 30-12AWG	250V/12A 28-12AWG	250V/12A 28-12AWG
300V/18A 28-12AWG	300V/18A 28-12AWG	300V/18A 28-12AWG	--	--
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MB1.5/H3.5(3.81)	MB1.5/HF3.5(3.81)	MB1.5/V3.5(3.81)	MB1.5/VF3.5(3.81)	MB1.5H/H3.81
300V/10A --	300V/10A --	300V/10A --	300V/10A --	300V/10A --
300V/8A --	300V/8A --	300V/8A --	300V/8A --	300V/8A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MB1.5H/V3.81	MB1.5H/VF3.81	MB2.5/H5.0(5.08)	MB2.5/H7.62	MB2.5/V5.0(5.08)
300V/10A --	300V/10A --	300V/18A --	300V/18A --	300V/18A --
300V/8A --	300V/8A --	300V/18A --	300V/18A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P



PCB terminal block

PCB接线端子

				
MB2.5/V7.62	MB2.5/HC5.0(5.08)	MB2.5/HC7.62	MB2.5/VC5.0(5.08)	MB2.5/VC7.62
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MB2.5/HF5.0(5.08)	MB2.5/HF7.62	MB2.5/VF5.0(5.08)	MB2.5/VF7.62	MB2.5HP/H5.08
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MB2.5HP/V5.08	MB2.5HP/HC5.08	MB2.5HP/VC5.08	MB2.5HP/HF5.08	MB2.5HP/VF5.08
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P
				
MB2.5I/H5.08	MB2.5I/V5.08	MB2.5I/HF5.08	MB2.5I/VF5.08	PM-MB2.5/HF5.08
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
300V/18A --	300V/18A --	300V/18A --	300V/18A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

PCB terminal block

PCB接线端子

				
MAP1.5/V3.5	MAP1.5/V5.0	MAP2.5/H5.08	MBP1.0/3.5	MBP1.5/5.0
300V/10A --	300V/10A --	300V/10A --	300V/10A --	300V/18A --
300V/10A 30-16AWG	300V/10A 30-16AWG	300V/10A 28-12AWG	300V/10A --	300V/18A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P	Pole 2P...24P

				
MBP2.5/H5.08	MBP0.5/2.4	MBP0.75/4.0	MBP0.75/4.0	BU7.62/H
300V/10A --	300V/4A 0.5mm²	300V/4A 0.5mm²	300V/4A 0.5mm²	300V/24A 2.5mm²
300V/10A --	-- --	-- --	-- --	300V/20A 22-12AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...24P	Pole --	Pole --	Pole --	Pole 2P...30P

				
BU7.62/HR	BU7.62/VL	BU7.62T/VL	BU7.62D/H	BU8.255/H
300V/24A 2.5mm²	300V/24A 2.5mm²	300V/24A 2.5mm²	300V/10A 2.5mm²	300V/24A 2.5mm²
300V/20A 22-12AWG	300V/20A 22-12AWG	300V/20A 22-12AWG	300V/20A 22-12AWG	300V/20A 26-12AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...30P	Pole 2P...30P	Pole 2P...30P	Pole 2P...24P	Pole 2P...28P

				
BU8.255/HR	BU8.255/HE	BU8.255/VL	BU8.255F/H	BU8.255F/HR
300V/24A 2.5mm²	300V/24A 2.5mm²	300V/24A 2.5mm²	300V/24A 2.5mm²	300V/24A --
300V/20A 26-12AWG	300V/20A 26-12AWG	300V/20A 26-12AWG	300V/20A 26-12AWG	300V/20A --
--	--	--	--	--
--	--	--	--	--
Pole 2P...28P	Pole 2P...28P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P

PCB terminal block

PCB接线端子

				
BU8.255F/HE	BU8.255F/VL	BU9.525/H	BU9.525/HR	BU9.525/HE
300V/24A 25mm²	300V/24A 25mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²
300V/20A 26-12AWG	300V/20A 26-12AWG	300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...28P	Pole 2P...28P	Pole 2P...28P

				
BU9.525/VL	BU9.525F/H	BU9.525F/HR	BU9.525F/HE	BU9.525F/VL
300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²
300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P

				
BU9.525T/HR	BU9.525T/VB	BU9.525TF/HR	BU9.525TF/VB	BU9.525D/H
300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/24A 2.5mm²
300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG	300V/25A 26-10AWG	300V/15A 22-14AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...24P

				
BU10/H	BU10/HR	BU10/HE	BU10/VL	BU10F/H
300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²
300V/25A 22-12AWG	300V/25A 22-12AWG	300V/25A 22-12AWG	300V/25A 22-12AWG	300V/25A 22-12AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P

PCB terminal block
PCB接线端子

				
BU10F/HR	BU10F/HE	BU10F/VL	BU13C/H	BU13C/HR
300V/32A 4mm²	300V/32A 4mm²	300V/32A 4mm²	750V/41A 6mm²	750V/41A 6mm²
300V/25A 22-12AWG	300V/25A 22-12AWG	300V/25A 22-12AWG	600V/40A 18-10AWG	600V/40A 18-10AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P

				
BU13C/HE	BU13C/VL	BU13CF/H	BU13CF/HR	BU13CF/HE
750V/41A 6mm²	750V/41A 6mm²	750V/41A 6mm²	750V/41A 6mm²	750V/41A 6mm²
600V/40A 18-10AWG	600V/40A 18-10AWG	600V/40A 18-10AWG	600V/40A 18-10AWG	600V/40A 18-10AWG
--	--	--	--	--
--	--	--	--	--
Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P	Pole 2P...26P

		
BU13CF/VL	BU16/HD	XH-YB18
750V/41A 6mm²	750V/41A 6mm²	60V/2A --
600V/40A 18-10AWG	600V/40A 18-10AWG	-- --
--	--	-- --
--	--	-- --
Pole 2P...26P	Pole 2P...10P	Pole 9P

Relay and Base
继电器及底座

Ultra thin relay
超薄继电器

		
超薄继电器-UR21系列 Ultra thin relay - UR21 series	超薄固态继电器-UR21S系列 Ultra thin solid-state relay - UR21S series	继电器底座 U41F-1Z-C2 Relay matching base
IEC 61984	IEC 61984	IEC 61984
形式Modality 1NO+1NC 1NO	形式Modality 1NO	形式Modality 1NO
触点负载Contact load 6A 250VAC/30VDC	触点负载Contact load 6A 280VAC / 2A 60VDC	触点负载Contact load 6A 250VAC
绝缘电阻Insulation resistance 1000mΩ (500VDC)	绝缘电阻Insulation resistance 100mΩ (500VDC)	绝缘电阻Insulation resistance 1000mΩ
介质电压Dielectric voltage 4000V	介质电压Dielectric voltage ≥1500VAC	介质电压Dielectric voltage 4000VAC
工作温度Working temperature -40~+85°C	工作温度Working temperature -30~+80°C	工作温度Working temperature -35~+70°C

	
继电器底座 U41F-1Z-C4 Relay matching base	继电器底座 U41F-1Z-A1 Relay matching base
IEC 61984	IEC 61984
形式Modality 1NO	形式Modality 1NO
触点负载Contact load 6A 250VAC	触点负载Contact load 6A 250VAC
绝缘电阻Insulation resistance 1000mΩ	绝缘电阻Insulation resistance 1000mΩ
介质电压Dielectric voltage 4000VAC	介质电压Dielectric voltage 4000VAC
工作温度Working temperature -35~+70°C	工作温度Working temperature -35~+70°C

Narrow version relay
窄型继电器

		
窄型继电器-UR22系列 Narrow version relay - UR22 series	窄型固态继电器-UR22S系列 Narrow solid-state relay - UR22S series	继电器底座 U1S-05B Relay matching base
IEC 61984	IEC 61984	IEC 61984
形式Modality 1NO+1NC	形式Modality --	形式Modality --
触点负载Contact load 12A 240VAC/30VDC	触点负载Contact load --	触点负载Contact load 12A 250VAC
绝缘电阻Insulation resistance ≥500mΩ	绝缘电阻Insulation resistance --	绝缘电阻Insulation resistance --
介质电压Dielectric voltage --	介质电压Dielectric voltage ≥2000VAC	介质电压Dielectric voltage 2000VAC
工作温度Working temperature -40~+70°C	工作温度Working temperature -30~+80°C	工作温度Working temperature -35~+70°C

Relay and Base
继电器及底座



继电器底座 U1S-08E Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U22-1Z-C5 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U22-1Z-05PU Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 SJ1S-61 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 1S-61-S Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



窄型继电器-UR22系列 Narrow version relay - UR22 series	
 	IEC 61984
形式Modality	1NO+1NC
触点负载Contact load	12A 240VAC/30VDC
绝缘电阻Insulation resistance	≥500mΩ
介质电压Dielectric voltage	--
工作温度Working temperature	-40~+70°C



继电器底座 U2S-05B Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U2S-08E Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U22-2Z-05PU Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Relay and Base
继电器及底座



继电器底座 SJ2S-61 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 2S-61-S Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	--
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Standard relay
标准继电器



标准继电器-UR23系列 Standard relay - UR23 series	
  	IEC 61984
形式Modality	2NO+2NC
触点负载Contact load	10A 220VAC/24VDC
绝缘电阻Insulation resistance	≥500mΩ
介质电压Dielectric voltage	2000V
工作温度Working temperature	-40~+70°C



继电器底座 U23-2Z-C1 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-C2 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-A2 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-C6 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-C8 Relay matching base	
  	IEC 61984
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Relay and Base

继电器及底座



继电器底座 U23-2Z-C4 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-C5 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-PU Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	10A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-C4 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-C5 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-PU Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

High current relay

大电流继电器



大电流继电器-UR24系列 High current relay - UR24 series	
CE RoHS CCC IEC 61984	
形式Modality	2NO+2NC
触点负载Contact load	12A 220VAC/24VDC
绝缘电阻Insulation resistance	≥500mΩ
介质电压Dielectric voltage	2000V
工作温度Working temperature	-40~+70°C



继电器底座 U24-2Z-A2 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U24-2Z-C1 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



标准继电器-UR23系列 Standard relay - UR23 series	
CE RoHS CCC IEC 61984	
形式Modality	4NO+4NC
触点负载Contact load	5A 220VAC/24VDC
绝缘电阻Insulation resistance	≥500mΩ
介质电压Dielectric voltage	2000V
工作温度Working temperature	-40~+70°C



继电器底座 U23-4Z-C1 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-2Z-C2 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-A2 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-C6 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U23-4Z-C8 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	7A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U24-2Z-C2 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U24B-2Z-C1 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U24B-2Z-C2 Relay matching base	
CE RoHS CCC IEC 61984	
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Relay and Base
继电器及底座



继电器底座 U24B-2Z-C3 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U24B-2Z-PU Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	15A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

High Protection Relay
高防护继电器



高防护继电器-UR26系列 High Protection Relay - UR26 series	
CE RoHS CCC	IEC 61984
形式Modality	1NO+1NC
触点负载Contact load	16A 220VAC/24VDC
绝缘电阻Insulation resistance	1000mΩ (500VDC)
介质电压Dielectric voltage	2000V
工作温度Working temperature	-40~+70°C



继电器底座 U26-1Z-A1 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-A2 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-A3 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-C2 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-C3 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	12A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Relay and Base
继电器及底座

High Protection Relay
高防护继电器



高防护继电器-UR26系列 High Protection Relay - UR26 series	
CE RoHS CCC	IEC 61984
形式Modality	2NO+2NC
触点负载Contact load	8A 220VAC/24VDC
绝缘电阻Insulation resistance	1000mΩ (500VDC)
介质电压Dielectric voltage	2000V
工作温度Working temperature	-40~+70°C



继电器底座 U26-2Z-A1 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-A2 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-2Z-A3 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-1Z-C2 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C



继电器底座 U26-2Z-C3 Relay matching base	
CE RoHS CCC	IEC 61984
形式Modality	--
触点负载Contact load	8A 250VAC
绝缘电阻Insulation resistance	1000mΩ
介质电压Dielectric voltage	2000VAC
工作温度Working temperature	-35~+70°C

Quick-Connect Terminal Block
快速接线端子



UBC-56X	
接线容量 Connection Capacity	0.2-4mm ² /24-12A
剥线长度Stripping Length	11mm
额定电压/电流Rated Voltage/Current	UL600V;IEC 450V,32A
工频耐电压Withstanding Voltage	AC3400V 1minute
绝缘抗阻Insulation Resistance	≥DC500V 500MΩ
工作温度Working temperature	-40~+70°C
产品有效位数Position	2P, 3P, 5P



UBC-59X	
接线容量 Connection Capacity	0.2-4mm ² /24-12A
剥线长度Stripping Length	14mm
额定电压/电流Rated Voltage/Current	IEC 450V,32A
工频耐电压Withstanding Voltage	AC2500V 1minute
绝缘抗阻Insulation Resistance	≥DC500V 500MΩ
工作温度Working temperature	-40~+70°C
产品有效位数Position	2P, 3P, 5P



UC41	
接线容量 Connection Capacity	IEC 0.5-2.5mm ² (Solid Wire)
剥线长度Stripping Length	10-12mm
额定电压/电流Rated Voltage/Current	IEC 300V,24A
工频耐电压Withstanding Voltage	AC2500V 1minute
绝缘抗阻Insulation Resistance	≥DC1000V,1000MΩ
工作温度Working temperature	-45~+80°C
产品有效位数Position	2P, 3P, 5P



UC42	
接线容量 Connection Capacity	IEC 0.5-2.5mm ² (Solid Wire)
剥线长度Stripping Length	10-12mm
额定电压/电流Rated Voltage/Current	IEC 300V,24A
工频耐电压Withstanding Voltage	AC2500V 1minute
绝缘抗阻Insulation Resistance	≥DC1000V,1000MΩ
工作温度Working temperature	-45~+80°C
产品有效位数Position	4P, 6P, 8P



UBC-52-X	
接线容量 Connection Capacity	0.2-2.5mm ² /24-12AWG(stranded wire) 0.2-4mm ² /24-12AWG(solid wire)
剥线长度Stripping Length	9mm
额定电压/电流Rated Voltage/Current	UL300V;IEC 450V,32A
工频耐电压Withstanding Voltage	AC2200V 1min
绝缘抗阻Insulation Resistance	≥DC500V 500MΩ
工作温度Working temperature	-40~+70°C
产品有效位数Position	2P, 3P, 5P



EU2.5	
接线容量 Connection Capacity	0.2-2.5mm ² /24-12AWG(stranded wire) 0.2-4mm ² /24-12AWG(solid wire)
剥线长度Stripping Length	9mm
额定电压/电流Rated Voltage/Current	UL300V;IEC 450V,32A
工频耐电压Withstanding Voltage	AC2200V 1min
绝缘抗阻Insulation Resistance	≥DC500V 500MΩ
工作温度Working temperature	-40~+70°C
产品有效位数Position	2P, 3P, 5P

Waterproof connector
防水连接器

Quick-connect series
快接系列



WPC20C-SC	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	2/3Pin
接线方式Wiring method	压接Crimping
额定电压Rated Voltage	450V
额定电流Rated Current	16A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm



WPC20C-SCT	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	2/3Pin
接线方式Wiring method	压接Crimping
额定电压Rated Voltage	450V
额定电流Rated Current	16A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm



WPC20C1-SCT	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	2Pin
接线方式Wiring method	内部连接器Internal connector
额定电压Rated Voltage	450V
额定电流Rated Current	24A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm



WPC20C1-SCX	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	2Pin
接线方式Wiring method	内部连接器Internal connector
额定电压Rated Voltage	450V
额定电流Rated Current	24A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm



WPC25C-SC	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	4/5Pin
接线方式Wiring method	压接Crimping
额定电压Rated Voltage	450V
额定电流Rated Current	16A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm



WPC25H-SC	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
接线数Number of wires	2/3Pin
接线方式Wiring method	内部连接器Internal connector
额定电压Rated Voltage	450V
额定电流Rated Current	24A
接线范围Wire Section	0.5-2.5mm ²
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm

Waterproof connector
防水连接器



WPC25C1-SCT		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3Pin	
接线方式Wiring method	内部连接器Internal connector	
额定电压Rated Voltage	450V	
额定电流Rated Curren	24A	
接线范围Wire Section	0.5-2.5mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	



WPC25C1-SCX		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3Pin	
接线方式Wiring method	内部连接器Internal connector	
额定电压Rated Voltage	450V	
额定电流Rated Curren	24A	
接线范围Wire Section	0.5-2.5mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	

Plug-in series
对插系列



WPC19S-PL		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	4/5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	20A	16A
接线范围Wire Section	0.5-2.5mm²	0.5-1.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	3.5-7mm, 5-8mm 7-10mm	



WPC28S-PL		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3/4Pin	5/6Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	50A	20A
接线范围Wire Section	0.5-6mm²	0.5-2.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	



WPC23C-PL		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	
接线方式Wiring method	压接Crimping	
额定电压Rated Voltage	450V	
额定电流Rated Curren	16A	
接线范围Wire Section	0.5-2.5mm²	
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	

Waterproof connector
防水连接器



WPC25C-PL		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	4/5Pin	
接线方式Wiring method	压接Crimping	
额定电压Rated Voltage	450V	
额定电流Rated Curren	16A	
接线范围Wire Section	0.5-2.5mm²	
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	

Panel series
面板系列



WPC19S-PLP1		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	4/5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	20A	15A
接线范围Wire Section	0.5-2.5mm²	0.5-1.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	3.5-7mm, 5-8mm 7-10mm	



WPC23-PL03/PL05		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3/5Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	16A	
接线范围Wire Section	0.5-4mm²	
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	6-9mm, 9-12mm	



WPC19S-PLP2		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	4/5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	20A	15A
接线范围Wire Section	0.5-2.5mm²	0.5-1.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	3.5-7mm, 5-8mm 7-10mm	



WPC23S-PLP1		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	4/5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	30A	15A
接线范围Wire Section	0.5-4mm²	0.5-2.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	

Waterproof connector
防水连接器



WPC23S-PLP2		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	4/5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	30A	15A
接线范围Wire Section	0.5-4mm²	0.5-2.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	



WPC28S-PLP1		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3/4Pin	5/6Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	50A	20A
接线范围Wire Section	0.5-6mm²	0.5-2.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	



WPC28S-PLP2		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3/4Pin	5/6Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	50A	20A
接线范围Wire Section	0.5-6mm²	0.5-2.5mm²
可插拔次数number of insertions	1500	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	

Lock stitch series
锁线系列



WPC20S-SCT		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	400V	
额定电流Rated Curren	24A	
接线范围Wire Section	0.5-2.5mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	



WPC25S-SCT		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	41A	
接线范围Wire Section	0.5-6mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm, 14-18mm	



UAC-200/03 or 05		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3Pin	5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	32A	25A
接线范围Wire Section	0.5-4mm²	0.5-2.5mm²
外线直径Outer Cable Diameter	4-6mm	

Waterproof connector
防水连接器



UAC-200/03T or 05T		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3/5Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	25A	
接线范围Wire Section	0.5-2.5mm²	
外线直径Outer Cable Diameter	4-6mm	



UAC-250Y		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3/4/5Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	32A	
接线范围Wire Section	0.5-4mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm	



WPC20S-SCX		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	24A	
接线范围Wire Section	0.5-2.5mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm	

Mini Waterproof Box Series
迷你防水盒系列



WPC25S-SCX		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	2/3Pin	
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	41A	
接线范围Wire Section	0.5-6mm²	
外线直径Outer Cable Diameter	5-9mm, 9-12mm 10-14mm, 14-18mm	

WPC23-SC03/SC05		
IP等级IP Code	IP68	
环境温度Temperature Range	-40°C~+105°C	
接线数Number of wires	3Pin	5Pin
接线方式Wiring method	螺钉Screw	
额定电压Rated Voltage	450V	
额定电流Rated Curren	25A	
接线范围Wire Section	0.5-4mm² 0.5-2.5mm²	
外线直径Outer Cable Diameter	4-6mm	

型号Model	WPB01	WPB02	WPB03
L	41	45	53
W	28	37	39
H(Bo×12)	19	24	24
包装Packing	泡沫Foam	泡沫Foam	泡沫Foam

Waterproof junction box
防水盒



CE

WPB20A-0201	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm



CE

WPB20A-0301	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M16:3.5-7mm, 7-10mm



CE

WPB20A-0401	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M16:3.5-7mm, 7-10mm



CE

WPB20A-0402	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M16:3.5-7mm, 7-10mm



CE

WPB20A-0501	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M16:3.5-7mm, 7-10mm



CE

WPB20A-0601	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	翻盖Flip Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M16:3.5-7mm, 7-10mm



CE

WPB20B-0401	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm



CE

WPB20B-1001	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm



CE

WPC20B-XXXX	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm

Waterproof junction box
防水盒



CE

WPB25B-0401	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M25:5-9mm, 9-12mm,10-14mm



CE

WPB25B-0301	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M25:5-9mm, 9-12mm,10-14mm



CE

WPB25B-0302	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	有沿天地盖With Edge Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M25:5-9mm, 9-12mm,10-14mm



CE

WPB25C-0201	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M25:5-9mm, 9-12mm,10-14mm



CE

WPB25C-0301	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M25:5-9mm, 9-12mm,10-14mm



CE

WPB25C-0401	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M25:5-9mm, 9-12mm,10-14mm



CE

WPB25C-0402	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M25:5-9mm, 9-12mm,10-14mm



CE

WPB25C-0501	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M25:5-9mm, 9-12mm,10-14mm




CE

WPB25C-0601	
IP等级IP Code	IP68
环境温度Temperature Range	-40°C~+105°C
盖子形式Cap Type	天地盖Top and Bottom Cover
接线范围Wire Section	0.5-6.0mm²
外线直径Outer Cable Diameter	M20:5-9mm, 9-12mm M25:5-9mm, 9-12mm,10-14mm

Cable Gland
电缆防水接头


PG Nylon Cable Gland
PG尼龙电缆压盖

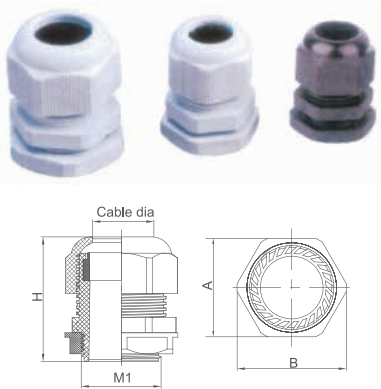

CE


UL US

BSP Nylon Cable Gland
BSP尼龙电缆压盖

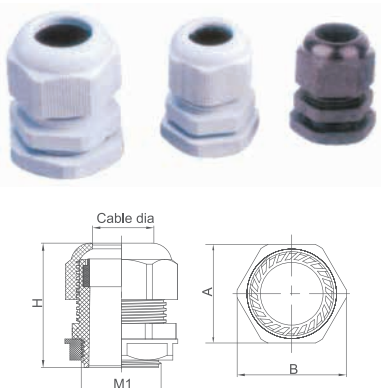

CE

M Nylon Cable Gland
M尼龙电缆压盖

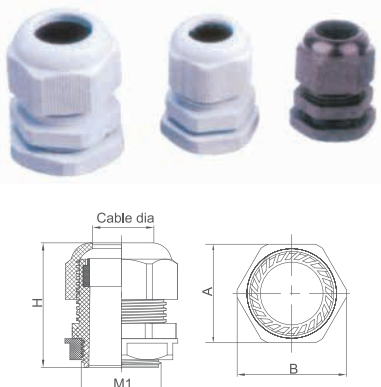


CE

型号Model	Cable dia	H	A	B	M1
PG7	3-6.5	31	16.1±0.2	17.9±0.2	12.3±0.2
PG9	4-8	32	18.8±0.2	20.5±0.2	15±0.2
PG11	6-10	33	21.6±0.2	23.7±0.2	19.4±0.2
PG13.5	6-12	37	23.8±0.2	25.3±0.2	20.3±0.2
PG16	8-14	43	26.7±0.2	29.7±0.2	22.4±0.2
PG19	12-15	42	27±0.3	29.7±0.3	24±0.3
PG21	13-18	48	32.7±0.3	36±0.3	28.3±0.3
PG25	14-20	44	34.9±0.3	39.9±0.3	29.8±0.3
PG29	18-24	50	41.4±0.3	44.9±0.3	31.9±0.3
PG36	22-32	61	50.6±0.3	56.1±0.3	46.7±0.3
PG42	32-38	64	59±0.3	65.2±0.3	53.5±0.3
PG48	37-44	62	62.5±0.3	68±0.3	58.9±0.3
PG63	42-52	86	75.5±0.3	83.2±0.3	71.1±0.3

型号Model	Cable dia	H	A	B	M1
BSP 1/4"	3-6.5	30	15.1±0.2	17.1±0.2	13
BSP 3/8"	5-10	34	21.7±0.2	24.1±0.2	16.5
BSP 1/2"	8-12	36	23.4±0.2	26.3±0.2	20.8
BSP 3/4"	13-18	45	32.5±0.2	36.0±0.2	26.2
BSP 1"	18-25	51	41.2±0.2	44.8±0.3	33
BSP 1 1/4"	25-32	64	52.2±0.3	57.5±0.3	41.5
BSP 1 1/2"	32-38	66	59.1±0.3	64.5±0.3	47.5
BSP 2"	37-43	72	67.2±0.3	74.2±0.3	59.6

型号Model	Cable dia	H	A	B	M1
M12*1.5	3-6.5	31	16±0.2	17.9±0.2	12
M16*1.5	5-8	34	18.7±0.2	20.6±0.2	16
M20*1.5	6-12	38	22.9±0.2	25.1±0.2	20
M25*1.5	12-18	43	32.5±0.3	35.5±0.3	25
M32*1.5	22-25	49	41.2±0.3	44.8±0.3	32
M40*1.5	25-32	63	52±0.3	57.8±0.3	40
M50*1.5	32-38	65	61.3±0.3	68.3±0.3	50
M63*1.5	37-44	66	67±0.3	72.9±0.3	63

UAC Series Air Connector
UAC系列航空连接器

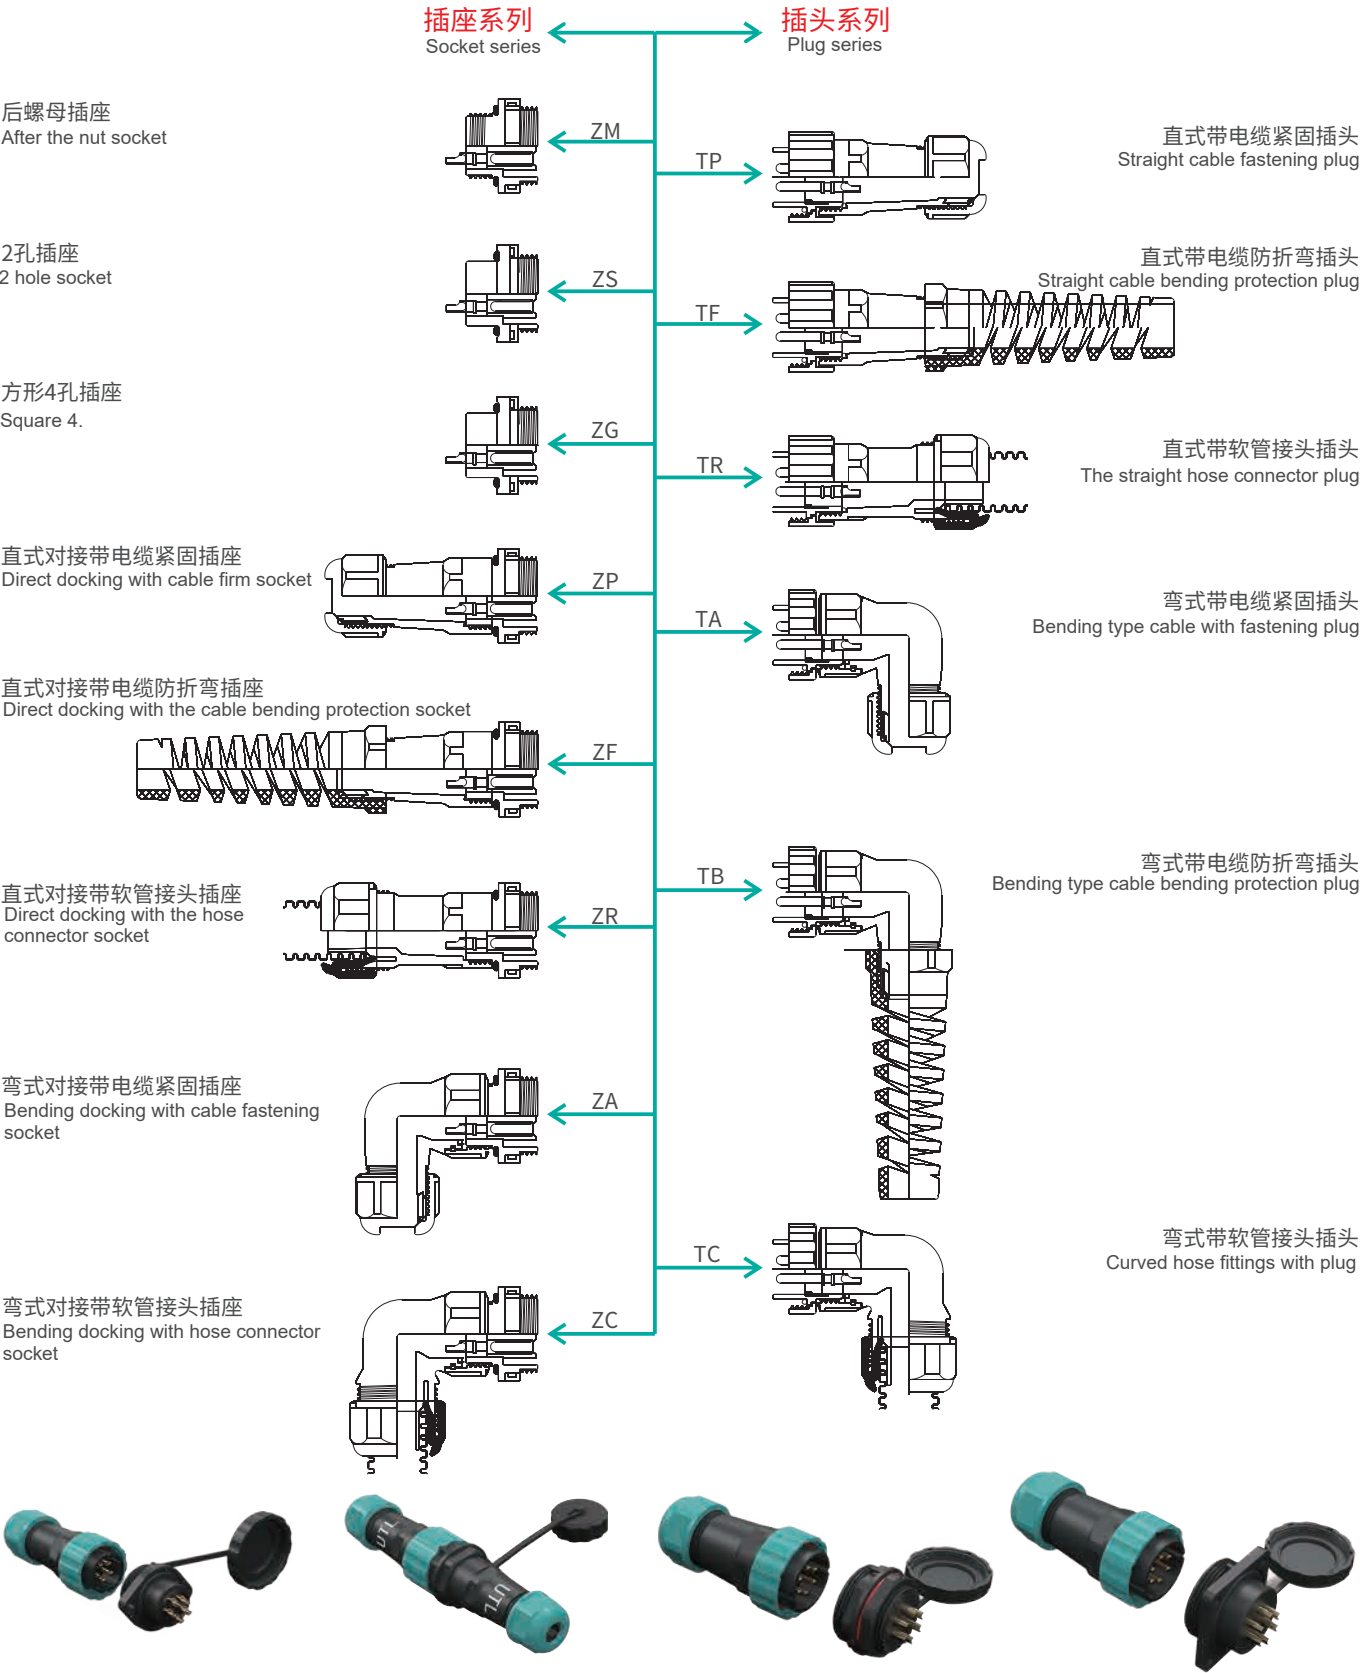

UAC Series Air Connector

UAC系列航空连接器

Screw series

螺钉系列

产品型号Product model	产品图片Product image	插头Plug	插座Socket		芯数Core count		
UAC12		TP	ZM	ZG	S02		
			ZS	ZP			
UAC13		TP	ZM	ZG	S02		
			ZS	ZP			
UAC16		TP	ZM	ZA	S02	S03	S04
			ZS	ZP			
UAC20		TP	ZM	ZG	S02	S03	S04 S05 S06 S07
			ZS	ZP	S04	S05	
					S06	S07	
UAC28		TP	ZM	ZG	S02	S03	S04
			ZS	ZP	S05	S06	S07
						S09	

Welding series

焊接系列

产品型号Product model	产品图片Product image	插头Plug	插座Socket		芯数Core count		
UAC13		TP	ZM	ZP	01	02	03
			ZS		04	05	06
						07	
UAC16		TP	ZM	ZG	02	03	04
			ZS	ZP	05	06	07
						09	
UAC20		TA TC	ZM	ZP	02	03	04
		TP TR	ZS	ZR	06	07	09
		TN	ZG	ZN		12	14
UAC28		TP TA	ZM	ZG	02	03	04
		TF TB	ZP	ZF	05	06	07
		TR TC		ZR		09	

Heavy Duty Connector

重载连接器

Technical Characteristic

技术参数

规范	Specifications	
规范	Specifications	DIN EN 60 664 DIN EN 61 984
插芯	Inserts	
依据EN 61984的额定电压	Electrical data acc. to EN 61 984	
接插件针数	Number Of Contacts	6,10,16,24,32(2X16),48(2X24)+PE
额定电流	Rated Current	16A
额定电压	Rated Voltage	500V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
污染等级2时的参数	Pollution Degree 2 Also	16A 400/690V 6kV 2
依据UL/CSA额定电压	Rated Voltage Acc. To UI CSA	600V
绝缘电阻	Insulation Resistance	≥10 ¹⁰ Ω
材料	Material	聚碳酸酯Polycarbonate
工作温度范围	Limiting Temperatures	-40°~+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	MechEnical Working Life-mating Cycles	≥500
插针	Contacts	
材料	Material	铜合金Copper Alloy
表面处理	Surface	镀金Hard-gold Plated 镀银Hard-silver Plated
接触电阻	Contact Resistance	≤1mΩ
螺钉连接	Screw Terminal	
导线规格	Wire Gauge	0.14-2.5mm ²
AWG	AWG	26-14
拧紧力矩	Tightening Torque	0.5Nm
剥线长度	Stripping length	7.0mm
冷压连接	Crimp Terminal	
导线规格	Wire Gauge	0.14-4.0mm ²
AWG	AWG	26-12
剥线长度	Stripping length	7.5mm
弹片连接	Crimp Terminal	
导线规格	Wire Gauge	0.14-2.5mm ²
AWG	AWG	26-14
剥线长度	Stripping length	7-9mm

Current Carrying Capacity


电流负载能力

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度。

The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals.

测试和控制过程依据

Measuring and testing techniques according to DIN EN 60512-5

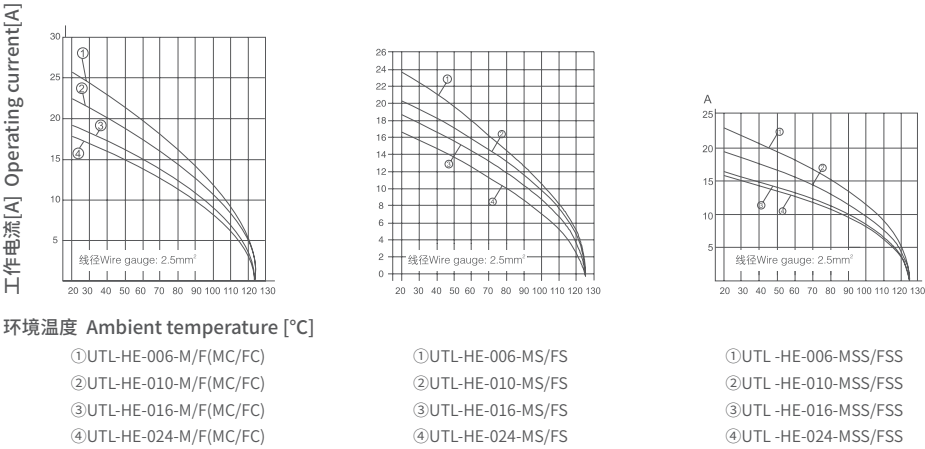

Heavy Duty Connector
重载连接器

插芯 Inserts

螺丝连接 Screw terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-006-M	09330062601
母Female	UTL-HE-006-F	09330062701

冷压连接 Crimp terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-006-MC	09330062602
母Female	UTL-HE-006-FC	09330062702

弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-006-MS	09330062616
母Female	UTL-HE-006-FS	09330062716



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-006-MSS	09330062672
母Female	UTL-HE-006-FSS	09330062772



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-006-MZ	09330062801
母Female	UTL-HE-006-FZ	09330062901

金属外壳 Metal shell

防护等级 Degree of protection : IP65

上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M20	UTL-H6B-SE-2B-M20	09330062601
M25	UTL-H6B-SE-2B-M25	09330062701
PG13.5	UTL-H6B-SE-2B-PG13.5	09330062601
PG16	UTL-H6B-SE-2B-PG16	09330062701

上壳侧出线高结构 Hoods, side entry, high construction




螺纹Thread	型号Type	订货号Part Number
M25	UTL-H6B-SEH-2B-M25	19300060546
M32	UTL-H6B-SEH-2B-M32	19300060547
PG21	UTL-H6B-SEH-2B-PG21	09300060542
PG29	UTL-H6B-SEH-2B-PG29	09300060543

更多型号咨询客户代表。
Consult the customer representative for more models.


UTL-HE 常规型插芯 500V 16A 6+

Distance for contact max.21mm
接插体之间的最大距离21MM




	a	b	e	g	c	d	f	m
M/F	16	32.4	51	34	16.8	34.5	50.5	34
MC/FC	18	33	51	34	18	35	50.5	34
MS/FS	18	33.3	51	34	18.2	35.4	50.5	34
MSS/FSS	34.5	49.5	50	34	33.4	50	50	34
MZ/FZ	17.4	32.5	51	33.8	17.2	34.5	51	33.8

Contacts arangement view trom termination side
接插针排序



Panel cut out for inserts for use without Hoods/housings
面板安装开孔图



Heavy Duty Connector
重载连接器

插芯 Inserts

螺丝连接 Screw terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-010-M	09330102601
母Female	UTL-HE-010-F	09330102701

冷压连接 Crimp terminal




插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-010-MC	09330102602
母Female	UTL-HE-010-FC	09330102702

弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-010-MS	09330102616
母Female	UTL-HE-010-FS	09330102716



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-010-MSS	09330102672
母Female	UTL-HE-010-FSS	09330102772



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-010-MZ	09330102801
母Female	UTL-HE-010-FZ	09330102901

金属外壳 Metal shell

防护等级 Degree of protection : IP65

上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M20	UTL-H10B-SE-2B-M20	19300101540
M25	UTL-H10B-SE-2B-M25	19300101541
PG16	UTL-H10B-SE-2B-PG16	09300101541

上壳侧出线高结构 Hoods, side entry, high construction




螺纹Thread	型号Type	订货号Part Number
M25	UTL-H10B-SEH-2B-M25	19300100546
M32	UTL-H10B-SEH-2B-M32	19300100547
PG21	UTL-H10B-SEH-2B-PG21	09300100542
PG29	UTL-H10B-SEH-2B-PG29	09300100543

更多型号咨询客户代表。
Consult the customer representative for more models.


UTL-HE 常规型插芯 500V 16A 10+

Distance for contact max.21mm
接插体之间的最大距离21MM



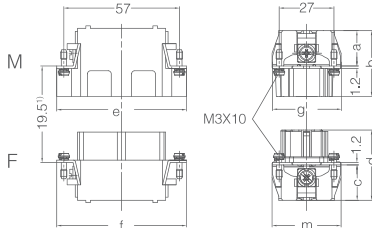


	a	b	e	g	c	d	f	m
M/F	16.5	32	64.5	34	16.8	34.2	64	34
MC/FC	18	33	64	34	17.5	35.2	64	34
MS/FS	18.5	33.5	64	34	18.5	35.6	64	34
MSS/FSS	34	49	64	34	33.5	49.5	63	34
MZ/FZ	17.4	32.5	64	33.8	17.2	34.5	64	33.8

Contacts arangement view trom termination side
接插针排序



Panel cut out for inserts for use without Hoods/housings
面板安装开孔图

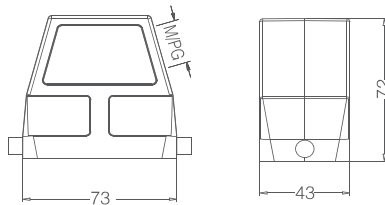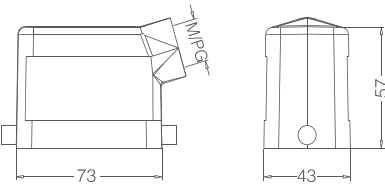

Heavy Duty Connector
重载连接器

插芯 Inserts

螺丝连接 Screw terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-M	09330162601
母Female	UTL-HE-016-F	09330162701

冷压连接 Crimp terminal




插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MC	09330162602
母Female	UTL-HE-016-FC	09330162702

弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MS	09330162616
母Female	UTL-HE-016-FS	09330162716



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MSS	09330162672
母Female	UTL-HE-016-FSS	09330162772



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MZ	09330162801
母Female	UTL-HE-016-FZ	09330162901

金属外壳 Metal shell

防护等级 Degree of protection : IP65


上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M25	UTL-H16B-SE-2L-M25	19300161531
M32	UTL-H16B-SE-2L-M32	19300161532
PG21	UTL-H16B-SE-2L-PG21	09300161530


UTL-HE 常规型插芯 500V 16A 16+

Distance for contact max.21mm
接插体之间的最大距离21MM

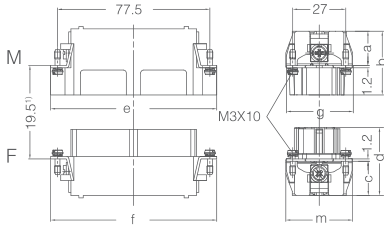


	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.5	84.2	33.5
MC/FC	18	33.5	84.5	34	18	35	84.5	34
MS/FS	18	33.7	84.5	34	18.2	35.4	84.5	34
MSS/FSS	34.3	49	84.5	34	32.2	49	84.5	34
MZ/FZ	17.4	32.5	84.5	33.8	17.2	34.5	84.5	33.8

Contacts arangement view from termination side
接插针排序



Panel cut out for inserts for use without Hoods/housings
面板安装开孔图



Heavy Duty Connector
重载连接器

插芯 Inserts

螺丝连接 Screw terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-M	09330242601
母Female	UTL-HE-024-F	09330242701

冷压连接 Crimp terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MC	09330242602
母Female	UTL-HE-024-FC	09330242702

弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MS	09330242616
母Female	UTL-HE-024-FS	09330242716



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MSS	09330242672
母Female	UTL-HE-024-FSS	09330242772



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MZ	09330242801
母Female	UTL-HE-024-FZ	09330242901

金属外壳 Metal shell

防护等级 Degree of protection : IP65

上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M25	UTL-H24B-SE-2B-M25	19300241541
M32	UTL-H24B-SE-2B-M32	19300241542
PG21	UTL-H24B-SE-2B-PG21	09300241540


上壳侧出线高结构 Hoods, side entry, high construction



螺纹Thread	型号Type	订货号Part Number
M25	UTL-H24B-SEH-2B-M25	19300240546
M32	UTL-H24B-SEH-2B-M32	19300240547
M40	UTL-H24B-SEH-2B-M40	19300240538
PG21	UTL-H24B-SEH-2B-PG21	09300240540
PG29	UTL-H24B-SEH-2B-PG29	09300240541
PG36	UTL-H24B-SEH-2B-PG36	09300240546


UTL-HE 常规型插芯 500V 16A 24+

Distance for contact max.21mm
接插体之间的最大距离21MM

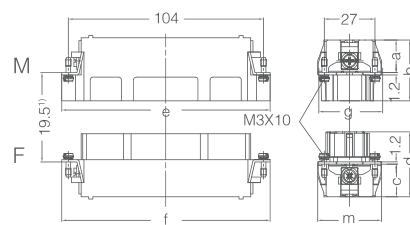

	a	b	e	g	c	d	f	m
M/F	16.7	32.5	111	33.5	17	34.5	111	33.5
MC/FC	18.3	33.5	111	34	18.3	35.5	111	34
MS/FS	18.5	33.6	111	34	18.3	35.6	111	34
MSS/FSS	34	49	110	34	32	49	110	34
MZ/FZ	17.4	32.5	111	33.8	17.2	34.5	111	33.8

Contacts arangement view from termination side
接插针排序




Panel cut out for inserts for use without Hoods/housings
面板安装开孔图



上壳侧出线高结构 Hoods, side entry, high construction





螺纹Thread	型号Type	订货号Part Number
M25	UTL-H16B-SEH-2L-M25	19300160536
M32	UTL-H16B-SEH-2L-M32	19300160537
M40	UTL-H16B-SEH-2L-M40	19300160538
PG21	UTL-H16B-SEH-2L-PG21	09300160530
PG29	UTL-H16B-SEH-2L-PG29	09300160531

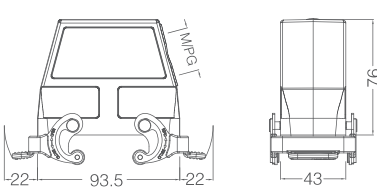

更多型号咨询客户代表。
Consult the customer representative for more models.


更多型号咨询客户代表。
Consult the customer representative for more models.

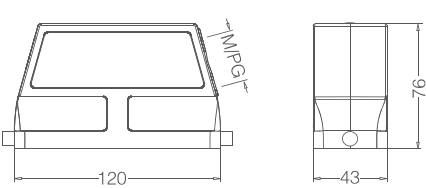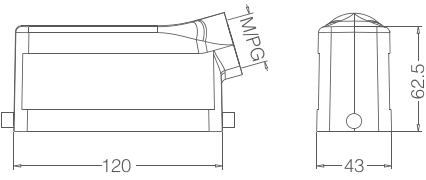

Heavy Duty Connector
重载连接器

插芯 Inserts

螺丝连接 Screw terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-M(1-16)	09330162601
	UTL-HE-016-M(17-32)	09330162611
母Female	UTL-HE-016-F(1-16)	09330162701
	UTL-HE-016-F(17-32)	09330162711

冷压连接 Crimp terminal



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MC(1-16)	09330162602
	UTL-HE-016-MC(17-32)	09330162612
母Female	UTL-HE-016-FC(1-16)	09330162702
	UTL-HE-016-FC(17-32)	09330162712


弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MS(1-16)	09330162616
	UTL-HE-016-MS(17-32)	09330162616
母Female	UTL-HE-016-FS(1-16)	09330162706
	UTL-HE-016-FS(17-32)	09330162716



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MSS(1-16)	09330162672
	UTL-HE-016-MSS(17-32)	09330162672
母Female	UTL-HE-016-FSS(1-16)	09330162772
	UTL-HE-016-FSS(17-32)	09330162772



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-016-MZ(1-16)	09330162801
	UTL-HE-016-MZ(17-32)	09330162811
母Female	UTL-HE-016-FZ(1-16)	09330162901
	UTL-HE-016-FZ(17-32)	09330162911

金属外壳 Metal shell

防护等级 Degree of protection : IP65

上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M32	UTL-H32B-SE-4B-M32	19300320527
M40	UTL-H32B-SE-4B-M40	19300320528
M50	UTL-H32B-SE-4B-M50	19300320529
PG29	UTL-H32B-SE-4B-PG29	09300320521
PG36	UTL-H32B-SE-4B-PG36	09300320522
PG42	UTL-H32B-SE-4B-PG42	09300320523
G2	UTL-H32B-SE-4B-G2	19300320525

上壳侧出线高结构 Hoods, side entry, high construction




螺纹Thread	型号Type	订货号Part Number
M32	UTL-H32B-TE-4B-M32	19300320427
M40	UTL-H32B-TE-4B-M40	19300320428
M50	UTL-H32B-TE-4B-M50	19300320429
PG29	UTL-H32B-TE-4B-PG29	09300320421
PG36	UTL-H32B-TE-4B-PG36	09300320422
PG42	UTL-H32B-TE-4B-PG42	09300320423

更多型号咨询客户代表。
Consult the customer representative for more models.


UTL-HE 常规型插芯 500V 16A 32+

Distance for contact max.21mm
接插体之间的最大距离21MM



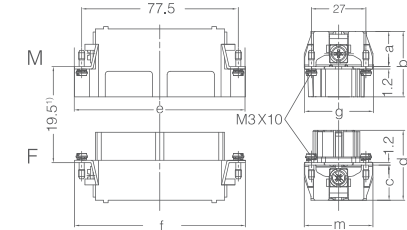


	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.5	84.2	33.5
MC/FC	18	33.5	84.5	34	18	35	84.5	34
MS/FS	18	33.7	84.5	34	18.2	35.5	84.5	34
MSS/FSS	34.3	49	84.5	34	32.2	49	84.5	34
MZ/FZ	17.4	32.5	84.5	33.8	17.2	34.5	84.5	33.8

Contacts arrangement view from termination side
接插针排序



Panel cut out for inserts for use without Hoods/housings
面板安装开孔图



Heavy Duty Connector
重载连接器

插芯 Inserts



螺丝连接 Screw terminal



冷压连接 Crimp terminal



弹片连接 Cage-clamp



插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-M(1-24)	09330242601
	UTL-HE-024-M(25-48)	09330242611
母Female	UTL-HE-024-F(1-24)	09330242701
	UTL-HE-024-F(25-48)	09330242711

插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MC(1-24)	09330242602
	UTL-HE-024-MC(25-48)	09330242612
母Female	UTL-HE-024-FC(1-24)	09330242702
	UTL-HE-024-FC(25-48)	09330242712

插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MS(1-24)	09330242616
	UTL-HE-024-MS(25-48)	09330242616
母Female	UTL-HE-024-FS(1-24)	09330242706
	UTL-HE-024-FS(25-48)	09330242716

插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MSS(1-24)	09330242672
	UTL-HE-024-MSS(25-48)	09330242672
母Female	UTL-HE-024-FSS(1-24)	09330242772
	UTL-HE-024-FSS(25-48)	09330242772

插芯Inserts	型号Type	订货号Part Number
公Male	UTL-HE-024-MZ(1-24)	09330242801
	UTL-HE-024-MZ(25-48)	09330242811
母Female	UTL-HE-024-FZ(1-24)	09330242901
	UTL-HE-024-FZ(25-48)	09330242911

金属外壳 Metal shell

防护等级 Degree of protection : IP65

上壳侧出线 Hoods, side entry



螺纹Thread	型号Type	订货号Part Number
M32	UTL-HV48B-SE-2B-M32	19340480547
M40	UTL-HV48B-SE-2B-M40	19340480548
M50	UTL-HV48B-SE-2B-M50	19340480549
PG29	UTL-HV48B-SE-2B-PG29	09340480540
PG36	UTL-HV48B-SE-2B-PG36	09340480541
PG42	UTL-HV48B-SE-2B-PG42	09340480542

上壳侧出线高结构 Hoods, side entry, high construction




螺纹Thread	型号Type	订货号Part Number
M32	UTL-HV48B-TE-2B-M32	19340480447
M40	UTL-HV48B-TE-2B-M40	19340480448
M50	UTL-HV48B-TE-2B-M50	19340480449
PG29	UTL-HV48B-TE-2B-PG29	09340480440
PG36	UTL-HV48B-TE-2B-PG36	09340480441
PG42	UTL-HV48B-TE-2B-PG42	09340480442

更多型号咨询客户代表。
Consult the customer representative for more models.


UTL-HE 常规型插芯 500V 16A 48+

Distance for contact max.21mm
接插体之间的最大距离21MM

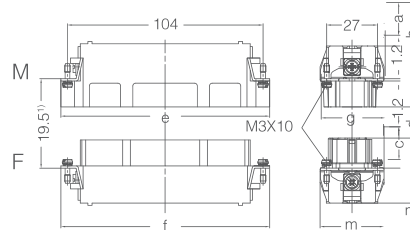

	a	b	e	g	c	d	f	m
M/F	17	32.5	111	33.5	17	34.5	111	33.5
MC/FC	18.3	33.5	111	34	18.3	35.5	111	34
MS/FS	18.5	33.6	111	34	18.3	35.6	111	34
MSS/FSS	34	49	110	34	32	49	110	34
MZ/FZ	17.4	32.5	111	33.8	17.2	34.5	111	33.8

Contacts arrangement view from termination side
接插针排序



Panel cut out for inserts for use without Hoods/housings
面板安装开孔图

